
MODE®

Technical Specification

Product Code: CMA10347L Luckinslive 440325073

Description: 3 Pole Fan Isolation Plate Keyswitch With Lockable 13A Fuse



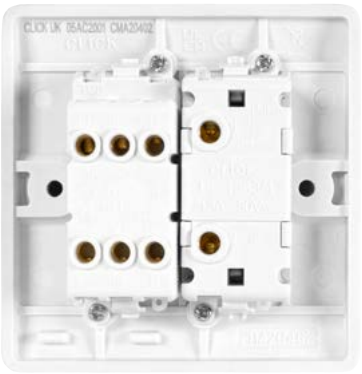

General Information

Plate Dimensions (mm)	86 (W) x 86 (H) x 9.5 (D)	
Style	Rounded Profile	
Colour	Polar White	
Supplied Fixing Screw Finish	Polished Chrome	
Materials	Front Plate & Rocker Switch: Urea	FCU Front: Nylon
	Rear Housing: Nylon	Terminals: Brass
	Terminal Screws: Steel & Yellow Passivated	Contacts: Silver "on-lay" Copper / Brass
	Internal Busbars: Formed Pressed Brass	Fuse: BS 1362 (13A)
Operating Voltage (AC)	250	Frequency (Hz) 50
Resistive Load Rating (A)	10	
Fuse Fitted Type	Plug Top Cartridge Fuse	
Termination Type	Screw	
Triple Pole Switch	Yes	
Keyswitch	Yes	
Product Marking	Fan Isolator, Isolator, On, Off', Fused	
Minimum Back Box Depth (mm)	25	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	25	

Standards BS EN 60669-2-4, BS 1362

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases as well as anti-viral properties against enveloped and non-enveloped viruses.
All products have been independently tested with 99.9% of enveloped viruses and 92% of non-enveloped viruses killed off whilst achieving a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

UK Patent: GB 2578427

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN