
MODE®

Technical Specification

Product Code: CMA1632RD

Luckinslive 440412465

Description: 13A 2 Gang Unswitched Safety Shutter Socket Outlet

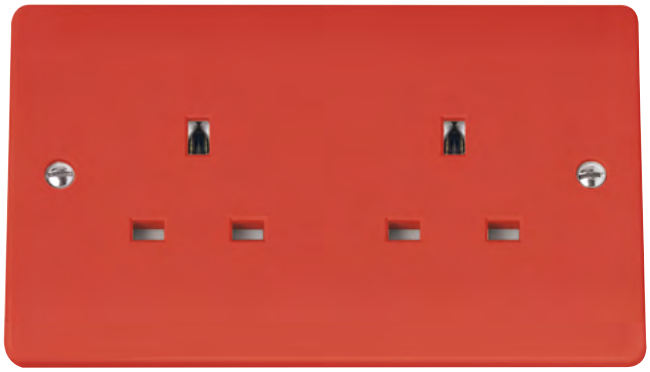



General Information

Plate Dimensions (mm)	146 (W) x 86 (H) x 9.5 (D)
Plate Fixing Centres - Horizontal (mm)	120.6
Style	Rounded Profile
Colour	Red
Supplied Fixing Screw Finish	Polished Chrome
Materials	Front Plate: Urea
	Rear Housing: Urea
	Terminals: Brass
	Terminal Screws: Steel & Yellow Passivated
	Earth Strap: Mild Steel
Anti Microbial Certified	Yes
Operating Voltage (AC)	250
Frequency (Hz)	50
Resistive Load Rating (A)	13
Termination Type	Screw
Terminal Size (mm)	Ø5
Terminal Torque Value (Nm)	2
Terminal Capacity - Solid (mm^2)	3 x 2.5 or 2 x 4
3 Pin Safety Shuttered	Yes
Twin Earth Terminals	Yes
Minimum Back Box Depth (mm)	25
Ingress Protection	IP20
Operational Temperature (°C)	-5 to +40
Warranty (Years)	25

Standards BS 1363-2

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases as well as anti-viral properties against enveloped and non-enveloped viruses.
All products have been independently tested with 99.9% of enveloped viruses and 92% of non-enveloped viruses killed off whilst achieving a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN