


Product Code: SFBZ596BK

Luckinslive 438821958

Description: 13A Ingot 2 Gang Switched Socket Outlet With Twin Type C USB (4.2A) Outlets

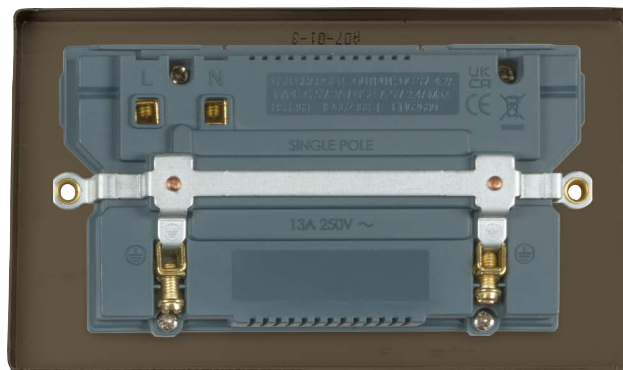

General Information

Dimensions (mm)	146 (W) x 86 (H) x 28 (D)	
Insert Dimensions (mm)	142.5 (W) x 82.5 (H) x 2.5 (D)	
Plate Dimensions (mm)	146 (W) x 86 (H) x 4 (D)	
Plate Fixing Centres - Horizontal (mm)	120.6	
Finish	Matt Bronze	
Insert Colour	Black	
Materials	Cover Plate: Stainless Steel Rear Housing: Nylon Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass Earth Strap: Mild Steel	Insert: Polycarbonate Terminals: Brass Contacts: Silver "on-lay" Copper / Brass PCB: Mixed Components
Anti Microbial Certified	No	
Operating Voltage (AC)	250	Frequency (Hz) 50
Resistive Load Rating (A)	13	
USB Output Type	USB Type 'C'	
USB Number Of Outputs	2	USB Charging Total Load (A) 4.2
USB Charging Voltage (V DC)	5	USB Standby Current (W) 0.1
Termination Type	Screw	
Terminal Size (mm)	Ø5	Terminal Torque Value (Nm) 1.2
Terminal Capacity - Solid (mm²)	3 x 2.5 or 2 x 4	
Single Pole Switched	Yes	
3 Pin Safety Shuttered	Yes	
Twin Earth Terminals	Yes	
Product Marking	5V DC 4.2A (SHARED)	
Minimum Back Box Depth (mm)	35	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	20	Warranty - Electronics (Years) 2
Standards	BS 1363-2: 2016 +A1: 2018, EN IEC 62368-1, EN IEC 62368-3, EN IEC 62680-1-3, EN IEC 61000-6-1 & EN 61000-6-3	

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
The USB circuits within this socket outlet are designed to withstand insulation resistance tests at 500V.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
Independent Charging: 5V DC, 4.2A – USB Type C (3A), USB Type C (3A)
Intelligent chip incorporated within the USB PCB adjusts the output according to the load connected.

