


Product Code: VPSB795WH

Luckinslive 438820988

Description: 13A 1 Gang Switched Socket Outlet With Twin Type C USB (4.2A) Outlets

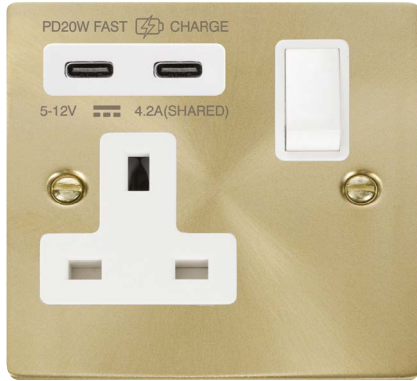

## General Information

Dimensions (mm)	91 (W) x 91 (H) x 28 (D)	
Plate Dimensions (mm)	88 (W) x 88 (H) x 8 (D)	
Dimensions With Gasket (mm)	91 (W) x 91 (H) x 9 (D)	
Plate Fixing Centres - Horizontal (mm)	60.3	
Finish	Satin Brass	
Insert Colour	White	
Gasket Colour	White	
Materials	Front Plate: Stainless Steel	Insert & Rocker Switch: Urea
	Housing: Nylon	Terminals: Brass
	Terminal Screws: Steel & Yellow Passivated	Contacts: Silver "on-lay" Copper / Brass
	Internal Busbars: Formed Pressed Brass	PCB: Mixed Components
	Earth Strap: Mild Steel	Gasket: Nylon
Anti Microbial Certified	No	
Operating Voltage (AC)	250	Frequency (Hz) 50
Resistive Load Rating (A)	13	
USB Output Type	USB Type 'C'	
USB Number Of Outputs	2	USB Charging Total Load (A) 4.2
USB Charging Voltage (V DC)	5	USB Standby Current (W) 0.1
Termination Type	Screw	
Terminal Size (mm)	Ø5	Terminal Torque Value (Nm) 1.2
Terminal Capacity - Solid (mm <sup>2</sup> )	3 x 2.5 or 2 x 4	
Single Pole Switched	Yes	
3 Pin Safety Shuttered	Yes	
Product Marking	5V DC 4.2A (SHARED)	
Minimum Back Box Depth (mm)	25	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	20	Warranty - Electronics (Years) 2
<b>Standards</b>	BS 1363-2: 2016 +A1: 2018, EN IEC 62368-1, EN IEC 62368-3, EN IEC 62680-1-3, EN IEC 61000-6-1 & EN 61000-6-3	

## Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.  
 The USB circuits within this socket outlet are designed to withstand insulation resistance tests at 500V.  
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.  
 Independent Charging: 5V DC, 4.2A - USB Type C (3A), USB Type C (3A)  
 Intelligent chip incorporated within the USB PCB adjusts the output according to the load connected.

