


Product Code: CMA606

Description: New Media™ Part Furnished Front Plate - 4 x 13A DP Switched Socket Outlets & Apertures

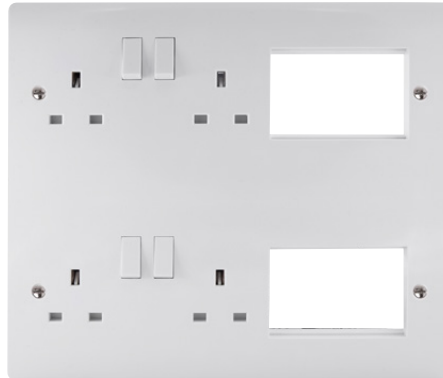

**General Information**

<b>Plate Dimensions (mm)</b>	250 (W) x 216 (H) x 8 (D)	
<b>New Media Aperture Dimensions (mm)</b>	75 x 50 (x2)	
<b>New Media Module Quantity</b>	Accepts Upto 2 Rows of 3 x 25mm x 50mm Modules	
<b>Style</b>	Mode	
<b>Finish</b>	Polar White	
<b>Materials</b>	Front Plate & Rear Housing: Urea	Terminals: Brass
	Terminal Screws: Steel & Yellow Passivated	Contacts: Silver "on-lay" Copper / Brass
	Internal Busbars: Formed Pressed Brass	Earth Strap: Mild Steel
<b>Anti Microbial Certified</b>	No	
<b>Rated Voltage (V~) (Ue)</b>	250	<b>Frequency (Hz)</b> 50
<b>Resistive Load Rating (A)</b>	13	
<b>Termination Type</b>	Screw	
<b>Terminal Size (mm)</b>	Ø5	<b>Terminal Torque Value (Nm)</b> 2.5
<b>Terminal Capacity - Solid (mm²)</b>	3 x 2.5 or 2 x 4	
<b>Double Pole Switch</b>	Yes	
<b>Twin Earth Terminals</b>	Yes	
<b>Compatible Back Box (mm)</b>	MP535 (35) Or MP525 (47)	
<b>Ingress Protection</b>	IP20	
<b>Operational Temperature (°C)</b>	-5 to +40	
<b>Warranty (Years)</b>	10	
<b>Standards</b>	BS 1363-2: 2016 +A1: 2018 BS 5733: 2010 +A1: 2014	

**Additional Information** Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Requires MP525 or MP535 flush back box.  
Interchangeable with modules in the New Media Range.