


Product Code: CPC100

Description: 20VA Dual Voltage Shaver Outlet (115-230V)

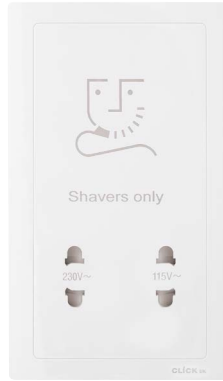

General Information

Dimensions (mm)	86 (W) x 146 (H) x 47.5 (D)	
Plate Dimensions (mm)	86 (W) x 146 (H) x 6.5 (D)	
Plate Fixing Centres - Vertical (mm)	120.6	
Style	Screwless	
Colour	White	
Insert Colour	White	
Materials	Cover Plate: Polycarbonate	Insert & Base: Polycarbonate
	Live & Neutral Terminals: Brass Plated Steel	Earth Terminal: Brass
	Terminal Screws: Steel & Yellow Passivated	Internal Busbars: Formed Pressed Brass
	Earth Strap: Mild Steel	
Operating Voltage (AC)	230	Frequency (Hz) 50
Load Rating @115V (Va)	20	
Load Rating @230V (Va)	20	
Fuse Fitted Type	PTC Resettable Fuse	
Thermal Protection Device	PTC Resettable Fuse	
Termination Type	Screw	
Terminal Size (mm)	Ø3	Terminal Torque Value (Nm) 0.4
Terminal Capacity - Solid (mm²)	2 x 1.5 or 1 x 2.5	
Socket Features	Safety Interlock Shutter	
Twin Earth Terminals	Yes	
Product Marking	Shavers Only	
Minimum Back Box Depth (mm)	47	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	10	

Standards BS EN 61558-1, BS EN 61558-2-5

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.

This outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.

CLICK dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms.

PTC resettable fuses increase resistance as temperature increases due to increased flow. PTC resettable fuses are designed to limit unsafe currents while allowing constant safe current levels, resistance will "reset" automatically when the fault is removed and temperature returns to a safe level.

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.



CLICK OR SCAN

Catalogue



Range



DoC



Installation



CLICK OR SCAN