


Product Code: CPC770SV

Description: 13A 2 Gang Switched UK Socket With USB Outlet

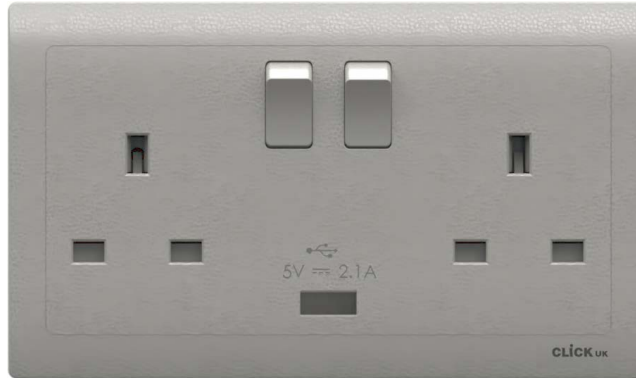

General Information

Dimensions (mm)	146 (W) x 86 (H) x 26.5 (D)		
Plate Dimensions (mm)	146 (W) x 86 (H) x 6.5 (D)		
Plate Fixing Centres - Horizontal (mm)	120.6		
Style	Screwless		
Colour	Silver		
Insert Colour	Silver		
Materials	Cover Plate: Polycarbonate	Insert, Switch & Base: Polycarbonate	
	Terminals: Brass	Terminal Screws: Steel & Yellow Passivated	
	Contacts: Silver "on-lay" Copper / Brass	Internal Busbars: Formed Pressed Brass	
	PCB: Electronic Components	Earth Strap: Mild Steel	
Anti Microbial Certified	No		
Operating Voltage (AC)	250	Frequency (Hz)	50
Resistive Load Rating (A)	13		
USB Output Type	USB Type 'A'		
USB Number Of Outputs	1	USB Charging Total Load (A)	2.1
USB Charging Voltage (V DC)	5	USB Standby Current (mA)	2
Termination Type	Screw		
Terminal Size (mm)	Ø4	Terminal Torque Value (Nm)	1.2
Terminal Capacity - Solid (mm ²)	3 x 2.5 or 2 x 4		
Number Of Socket Outlets	2		
Single Pole Switched	Yes		
Twin Earth Terminals	Yes		
Product Marking	USB 5V 2.1A		
Minimum Back Box Depth (mm)	35		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	10	Warranty - Electronics (Years)	1

Standards BS 1363-2, BS EN 62368-1, BS EN 62680-1-1

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
 The USB circuits within this socket outlet are designed to withstand insulation resistance tests at 500V.
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.



CLICK OR SCAN

Catalogue



Range



DoC



Installation



CLICK OR SCAN