
Technical Specification

Product Code: CT605C

Luckinslive 439203452

Description: 250V 20A 6 Pole Slim Complete Push Fit Connector With Loop

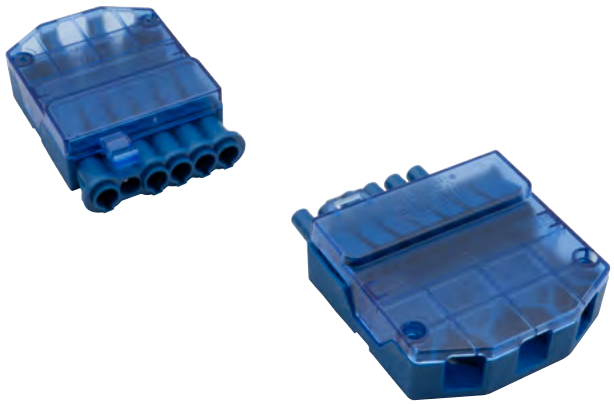

General Information

CT605F Dimensions (mm)	54 (W) x 78 (L) x 22 (D)		
CT605M Dimensions (mm)	66 (W) x 78 (L) x 22 (D)		
Materials	Cover: Polycarbonate	Base & Terminal Housing: Nylon (PA66)	
	Terminals: Silver Plated Brass	Contact Spring: Stainless Steel	
Operating Voltage (AC)	250	Frequency (Hz)	50
Resistive Load Rating (A)	20		
Rated Impulse Voltage (kV)	4		
Recommended Inner Core Strip Length (mm)	L N Sw/L + - : 30; E: 38		
Recommended Conductor Strip Length (mm)	12		
Termination Type	Push Fit		
Terminal Size (mm)	Ø4.2	Terminal Torque Value (Nm)	
Terminal Capacity - Solid (mm^2)	2 x 2.5 (Max.)		
Terminal Capacity - Flex (mm^2)	2 x 2.5 (Max.)		
Termination Layout (Male)	(CT605M) - + Sw/L N E L		
Termination Layout (Female)	(CT605F) L E N Sw/L + - Loop		
Cable Restraint Supplied	Yes		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	20		

Standards IEC 61535

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation.
Always refer to the circuit diagram supplied with the relevant product.
Any dangerous compatibility between different manufactures installation coupler systems is not automatically prevented by compliance with IEC 61535.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN