
Technical Specification

Product Code: CT7650 Luckinslive 439203384

Description: 6A 6 Pole Flow Connector Pre-wired 0.75mm² LSZH To FE - 5m

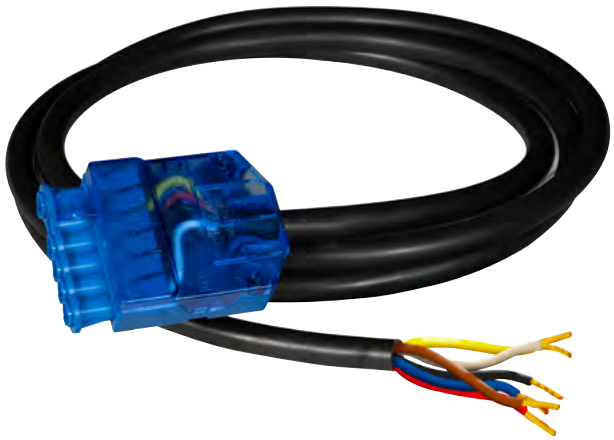

General Information

Insert Colour	Blue		
Materials	Cover: Polycarbonate	Base & Terminal Housing: Nylon (PA66)	
	Terminals: Silver Plated Brass	Contact Spring: Stainless Steel	
	Cable: LSZH thermoplastic & Copper		
Operating Voltage (AC)	250	Frequency (Hz)	50
Resistive Load Rating (A)	6		
Cable - Assembly Rating (A)	6		
Rated Impulse Voltage (kV)	4		
Pre-wired Cable Specification	6G 0.75mm² (Low Smoke Zero Halogen) H05Z1Z1-F		
Cable Restraint Supplied	Yes		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	20		

Standards IEC 61535

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation.
Always refer to the circuit diagram supplied with the relevant product.
Any dangerous compatibility between different manufactures installation coupler systems is not automatically prevented by compliance with IEC 61535.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Catalogue Range DoC CLICK OR SCAN