define®

Technical Specification


CLICK® Scolmore GROUP

Product Code: FPMB414BK

Luckinslive 439633132

Description: 10AX Ingot 4 Gang 2 Way Plate Switch



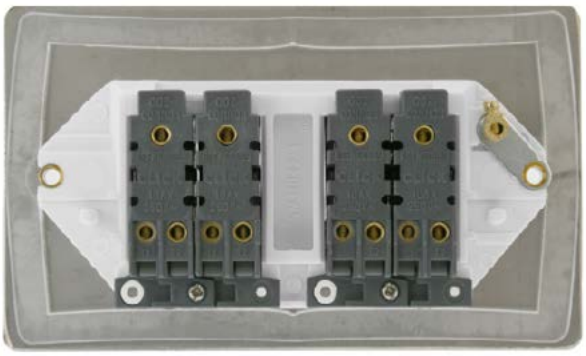

General Information

Dimensions (mm)	146 (W) x 86 (H) x 25 (D)		
Plate Dimensions (mm)	146 (W) x 86 (H) x 1.3 (D)		
Dimensions With Gasket (mm)	146 (W) x 86 (H) x 3 (D)		
Plate Fixing Centres - Horizontal (mm)	120.6		
MiniGrid Plate (Gang)	2		
MiniGrid Single Width Module Quantity	2 x 2		
MiniGrid Double Width Module Quantity	2		
Style	Flat Plate		
Finish	Matt Black		
Insert Colour	Black		
Gasket Colour	Transparent (Neoprene)		
Supplied Fixing Screw Finish	Matt Black		
Materials	Front Plate: Stainless Steel	Insert: Urea	
	Switch Cover: Stainless Steel	Rear Housing: Nylon	
	Terminals: Brass	Terminal Screws: Steel & Yellow Passivated	
	Contacts: Silver "on-lay" Copper / Brass	Internal Busbars: Formed Pressed Brass	
	Earth Strap: Mild Steel		
Anti Microbial Certified	No		
Operating Voltage (AC)	250	Frequency (Hz)	50
Inductive Load Rating (AX)	10		
Load Rating Comments	Suitable for Fluorescent or Inductive Loads		
Termination Type	Screw		
Terminal Size (mm)	Ø3.5	Terminal Torque Value (Nm)	0.5
Terminal Capacity - Solid (mm^2)	4 x 1.5 or 2 x 2.5		
Modular Rocker Switches	Yes		
2 Way Switch	Yes		
Minimum Back Box Depth (mm)	25		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	20		

Standards BS EN 60669-1

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Interchangeable with modules in the MiniGrid Range. MINIGRID®

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CE UKCA

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN