
essentials™

# Technical Specification

Product Code: FS032AB

Description: 13A 2 Gang Floor Socket Outlet

Luckinslive 439207076

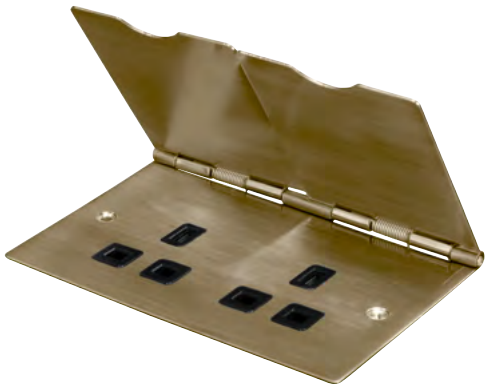

## General Information

| | | | |
|---|---|---|---|
| Dimensions (mm) | 146 (W) x 93 (D) x 5 (H) | | |
| Plate Fixing Centres - Horizontal (mm) | 120.6 | | |
| Finish | Antique Brass | | |
| Insert Colour | Black | | |
| Supplied Fixing Screw Finish | Polished Brass | | |
| Materials | Plate & Lid: Stainless Steel | Insert: Urea | |
| | Internal Busbars: Brass | Terminals: Brass | |
| | Terminal Screws: Steel and Yellow Passivated | Earth Bar: Mild Steel | |
| Anti Microbial Certified | No | | |
| Operating Voltage (AC) | 250 | Frequency (Hz) | 50 |
| Resistive Load Rating (A) | 13 | | |
| Termination Type | Screw | | |
| Terminal Size (mm) | Ø5 | Terminal Torque Value (Nm) | 2 |
| Terminal Capacity - Solid ($mm^2$) | 3 x 2.5 or 2 x 4 | | |
| Switched | No | | |
| Twin Earth Terminals | Yes | | |
| Minimum Back Box Depth (mm) | 35 | | |
| Ingress Protection | IP20 | | |
| Operational Temperature (°C) | -5 to +40 | | |
| Warranty (Years) | 10 | | |

**Standards** BS 1363-2

## Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
**T:** +44 (0)1827 63454 | **F:** +44 (0)1827 63362
**E**: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN