


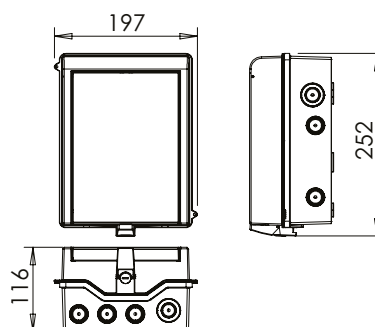

General Information

Dimensions With Door (mm)	195 (W) x 250 (H) x 120 (D)	
Enclosure Dimensions (mm)	195 (W) x 250 (H) x 120 (D)	
Colour	White	
Materials	Enclosure & Cover: Powder Coated Aluminium	DIN Rail: Galvanised Steel
Rated Operational Voltage (AC) (Ue)	230	
Frequency (Hz)	50/60	
Maximum Rated Current (A) (In)	63	
Free Ways	3	
Total Ways	5	
Device Terminals	Screwed Lug & Pin	
RCD Installed	1 x 63A 30mA RCCB (CU2RCD63A)	
RCD Terminal Capacity (mm²)	16	RCD Terminal Torque (Nm) 2.5
Blanks Supplied	1 (Product Code: CU1BLANK)	
E&N Terminals	Screw	
E&N Bars Capacity (mm²)	16	E&N Bars Torque (Nm) 2
Tail Clamp Capacity (mm²)	25	Tail Clamp Torque (Nm) 1.5
Enclosure Side Knockouts (Ømm)	3 x 20, 2 x 25 & 1 x 32	
Enclosure Top Knockouts (Ømm)	4 x 20, 3 x 25 & 1 x 32	
Enclosure Bottom Knockouts (Ømm)	4 x 20, 3 x 25 & 1 x 32	
Enclosure Rear Knockouts (mm)	2 x 20 & 1 x 32	
Impact Rating	IK05	
Ingress Protection	IP65	
Storage Temperature (°C)	-40 to +75	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	10	Warranty - Devices (Years) 3
Standards	BS EN 61439-3, BS EN 61008-1	

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Elucian metal consumer units allow compliance with BS 7671 Wiring Regulations

