


Product Code: OBKC4-U-B

Luckinslive 438592096

Description: 4W LED IP20 Maintained Self-Test Enable / Disable Emergency Sign – Legend Up  
– 5500K - Black

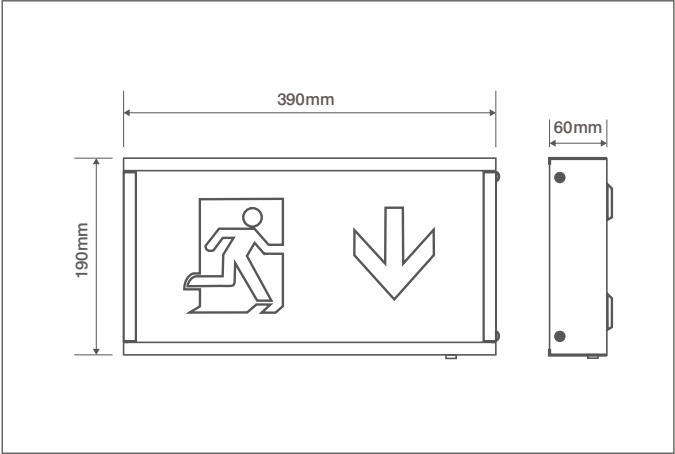

General Information

|                     |                                             |
|---------------------|---------------------------------------------|
| Dimensions (mm)     | 190 (H) x 390 (W) x 60 (D)                  |
| Materials           | Housing: Powder Coated Steel; Sign: Acrylic |
| Colour              | Black                                       |
| Product Weight (Kg) | 1.5                                         |
| Ingress Protection  | IP20                                        |
| Self-Test Facility  | Facility to Enable or Disable               |
| Warranty (Years)    | 5                                           |

Supply & Power Information

|                                        |                              |
|----------------------------------------|------------------------------|
| Continuous Operating Voltage (AC) (Hz) | 220-240 (50/60)              |
| Safety Class                           | I                            |
| Circuit Wattage (W)                    | 4                            |
| LED Wattage (W)                        | 4                            |
| Operation Mode                         | Maintained or Non-maintained |
| Cable Entry                            | 2 x Ø20mm Knockouts          |
| Operating Temperature (°C)             | 0 to +40                     |
| Maximum Critical Temperature (°C)      | +70                          |

Luminaire Output

|                            |       |
|----------------------------|-------|
| Colour Temperature (K)     | 5500  |
| Typical Luminous Flux (lm) | 60    |
| Beam Angle (°)             | 100   |
| Viewing Distance (M)       | 34    |
| LED Lifetime (L70) (Hours) | 30000 |

Emergency Backup Information

|                              |                                        |
|------------------------------|----------------------------------------|
| Self-Test Facility           | Facility to Enable or Disable          |
| Emergency Luminous Flux (lm) | 70                                     |
| Battery Specification        | 3.2V 1800mAh Lithium (LiFePO4) Battery |
| Minimum Duration (Hours)     | 3                                      |

Compatible Accessories

|                                                                      |
|----------------------------------------------------------------------|
| OBKB3218 - 3.2V 1800mAh Lithium (LiFePO4) Battery With 15cm Fly Lead |
|----------------------------------------------------------------------|



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,  
Tamworth, Staffordshire, B79 7UL United Kingdom  
T: +44 (0)1827 300640  
E: sales@oviaUK.com | W: oviaUK.com



CLICK OR SCAN

Catalogue



Section



DoC



Installation



CLICK OR SCAN