


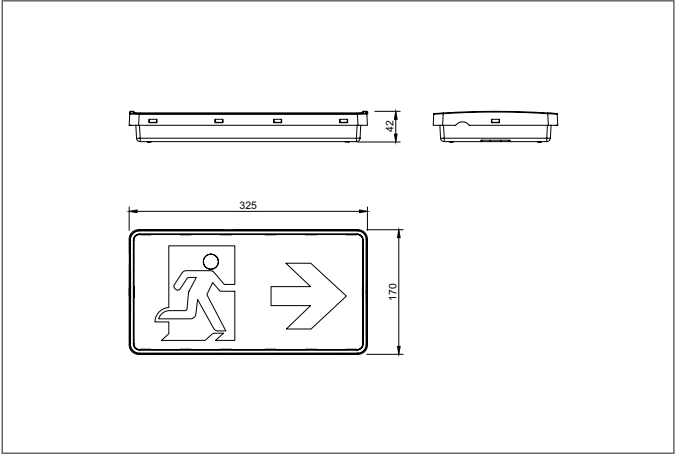

General Information

Dimensions (mm)	175 (H) x 325 (W) x 42 (D)
Materials	Housing: Polycarbonate; Sign: Acrylic
Colour	White
Product Weight (Kg)	0.54
Ingress Protection	IP65
Self-Test Facility	Facility to Enable or Disable
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Circuit Wattage (W)	2.5
LED Wattage (W)	2.5
Input Current	45
Operation Mode	Maintained
Driver Output	260-300mA
Operating Temperature (°C)	0 to +40

Luminaire Output

Colour Temperature (K)	5500
Typical Luminous Flux (lm)	60
Beam Angle (°)	140
Colour Render Index (CRI)	≥73
Viewing Distance (M)	32
LED Lifetime (L70) (Hours)	35000

Emergency Backup Information

Self-Test Facility	Facility to Enable or Disable
Emergency Luminous Flux (lm)	60
Battery Specification	3.2V 1800mAh Lithium (LiFePO4) Battery
Minimum Duration (Hours)	3

Compatible Accessories

OBKB3218 - 3.2V 1800mAh Lithium (LiFePO4) Battery With 15cm Fly Lead
--

