


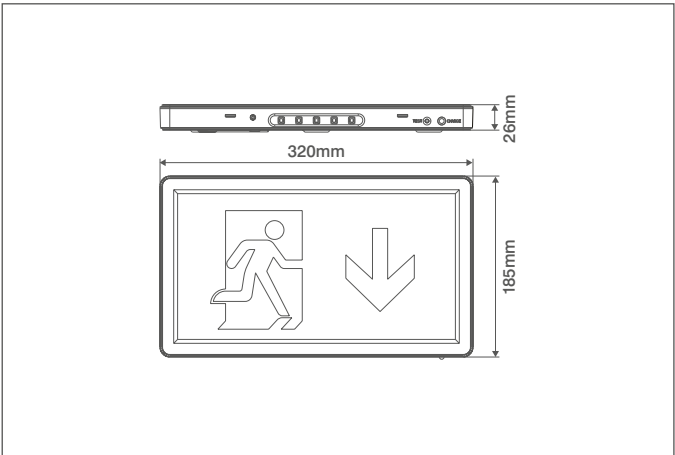

General Information

Dimensions (mm)	185 (H) x 320 (W) x 26 (D)
Materials	Housing: Polycarbonate; Sign: Acrylic
Colour	Black
Product Weight (Kg)	0.9
Ingress Protection	IP40
Self-Test Facility	Facility to Enable or Disable
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	I
Circuit Wattage (W)	2
LED Wattage (W)	2
Input Current	60
Power Factor	0.27
Operation Mode	Maintained or Non-maintained
Driver Output	200mA
Operating Temperature (°C)	0 to +40

Luminaire Output

Colour Temperature (K)	6500
Typical Luminous Flux (lm)	45
Beam Angle (°)	120
Colour Render Index (CRI)	≥70
Viewing Distance (M)	24
LED Lifetime (L70) (Hours)	50000

Emergency Backup Information

Self-Test Facility	Facility to Enable or Disable
Emergency Luminous Flux (lm)	40
Battery Specification	3.2V 1000mAh Li-FePO4
Minimum Duration (Hours)	3

Compatible Accessories

OBKB3210D - 3.2V 1000mAh Lithium (LiFePO4) Battery
--

