


Product Code: OBKH2-U-B

Luckinslive 438592164

Description: 2W LED IP20 Maintained Self-Test Enable / Disable Emergency Exit Box – Legend Up – 5500K - Black

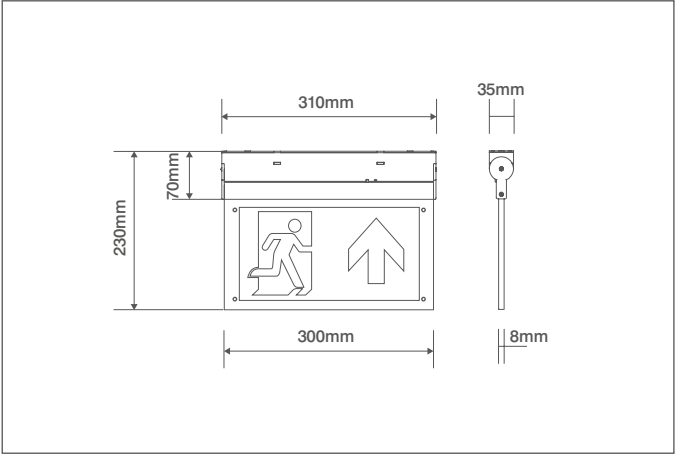

General Information

Dimensions (mm)	310 (L) x 35 (D) x 230 (H)
Materials	Housing: Polycarbonate; Sign: Acrylic
Colour	Black
Product Weight (Kg)	0.88
Ingress Protection	IP20
Self-Test Facility	Facility to Enable or Disable
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	II
Circuit Wattage (W)	2
LED Wattage (W)	2
Operation Mode	Maintained or Non-maintained
Cable Entry	Rear Aperture
Operating Temperature (°C)	0 to +40
Maximum Critical Temperature (°C)	+70

Luminaire Output

Colour Temperature (K)	5500
Typical Luminous Flux (lm)	40
Beam Angle (°)	100
Viewing Distance (M)	26
LED Lifetime (L70) (Hours)	30000

Emergency Backup Information

Self-Test Facility	Facility to Enable or Disable
Emergency Luminous Flux (lm)	30
Battery Specification	3.2V 1800mAh Lithium (LiFePO4) Battery
Minimum Duration (Hours)	3

Compatible Accessories

OBKB3218 - 3.2V 1800mAh Lithium (LiFePO4) Battery With 15cm Fly Lead
--



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | W: oviaUK.com



CLICK OR SCAN

Catalogue



Section



DoC



Installation



CLICK OR SCAN