
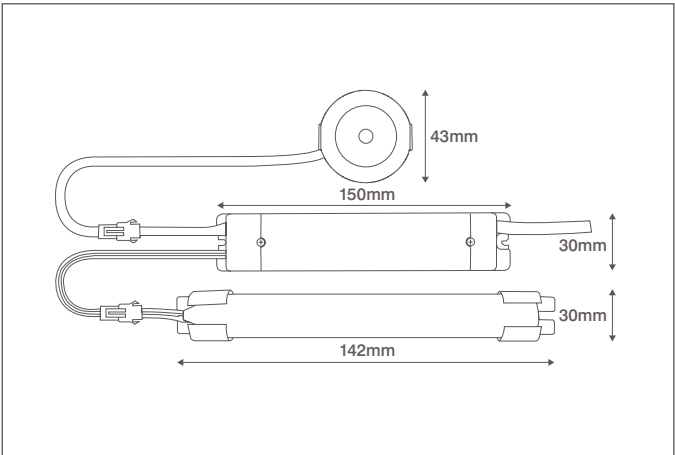


Product Code: OBKI30

Luckinslive 438592193

Description: 3W LED IP20 Non-Maintained Self-Test Enable / Disable Emergency Open
Downlight – 5500K – White, Black & Silver

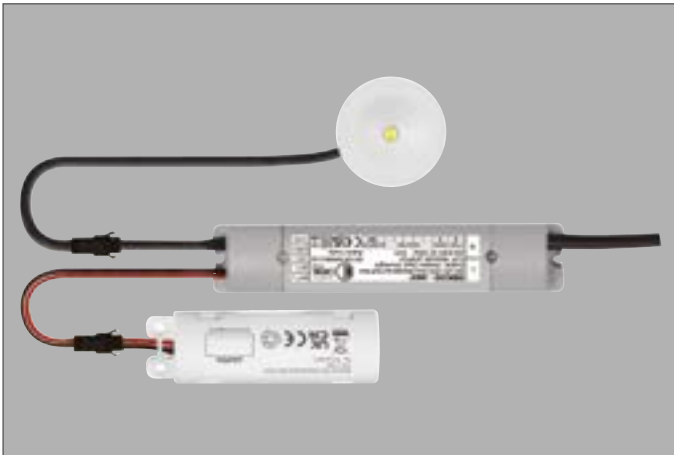

General Information

Dimensions (mm)	150 (L) x 30 (W) x 30 (D)
Materials	Downlight: Polycarbonate
Colour	White, Black, Silver
Product Weight (Kg)	0.3
Cutout Diameter (mm)	35
Recess Depth (mm)	30
Ingress Protection	IP20
Self-Test Facility	Facility to Enable or Disable
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	II
Circuit Wattage (W)	3
LED Wattage (W)	3
Operation Mode	Non-maintained Only
Operating Temperature (°C)	0 to +40
Maximum Critical Temperature (°C)	+70

Luminaire Output

Colour Temperature (K)	5500
Beam Angle (°)	120
LED Lifetime (L70) (Hours)	30000

Emergency Backup Information

Self-Test Facility	Facility to Enable or Disable
Emergency Luminous Flux (lm)	130
Battery Specification	3.2V 1800mAh Lithium (LiFePO4) Battery
Minimum Duration (Hours)	3

Compatible Accessories

OBKB3218E - 3.2V 1800mAh Lithium (LiFePO4) Battery With Enclosure

Additional Information

Supplied with Black, White & Silver Bezels

