


Product Code: OBKI50

Luckinslive 438592216

Description: 5W LED IP20 Non-Maintained Self-Test Enable / Disable Emergency Open  
Downlight – 5500K – White

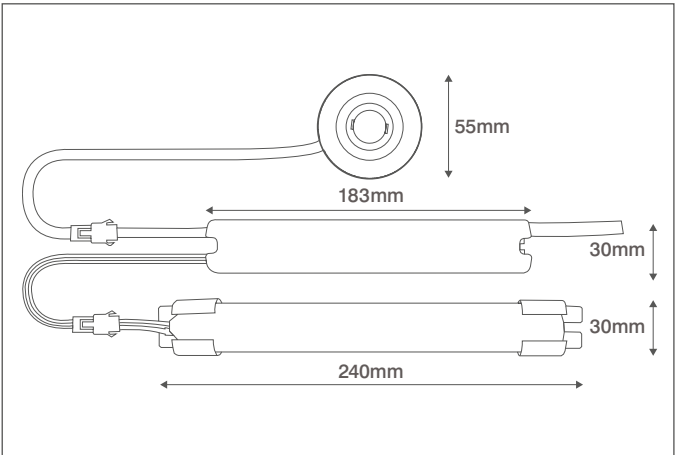

General Information

|                      |                               |
|----------------------|-------------------------------|
| Dimensions (mm)      | 183 (L) x 30 (W) x 30 (D)     |
| Materials            | Downlight: Polycarbonate      |
| Colour               | White                         |
| Product Weight (Kg)  | 0.7                           |
| Cutout Diameter (mm) | 48                            |
| Recess Depth (mm)    | 30                            |
| Ingress Protection   | IP20                          |
| Self-Test Facility   | Facility to Enable or Disable |
| Warranty (Years)     | 5                             |

Supply & Power Information

|                                        |                     |
|----------------------------------------|---------------------|
| Continuous Operating Voltage (AC) (Hz) | 220-240 (50/60)     |
| Safety Class                           | II                  |
| Circuit Wattage (W)                    | 5                   |
| LED Wattage (W)                        | 5                   |
| Operation Mode                         | Non-maintained Only |
| Operating Temperature (°C)             | 0 to +40            |
| Maximum Critical Temperature (°C)      | +70                 |

Luminaire Output

|                            |       |
|----------------------------|-------|
| Colour Temperature (K)     | 5500  |
| Beam Angle (°)             | 120   |
| LED Lifetime (L70) (Hours) | 30000 |

Emergency Backup Information

|                              |                                        |
|------------------------------|----------------------------------------|
| Self-Test Facility           | Facility to Enable or Disable          |
| Emergency Luminous Flux (lm) | 250                                    |
| Battery Specification        | 3.2V 6000mAh Lithium (LiFePO4) Battery |
| Minimum Duration (Hours)     | 3                                      |

Compatible Accessories

OBKB3260E - 3.2V 6000mAh Lithium (LiFePO4) Battery With Enclosure

