
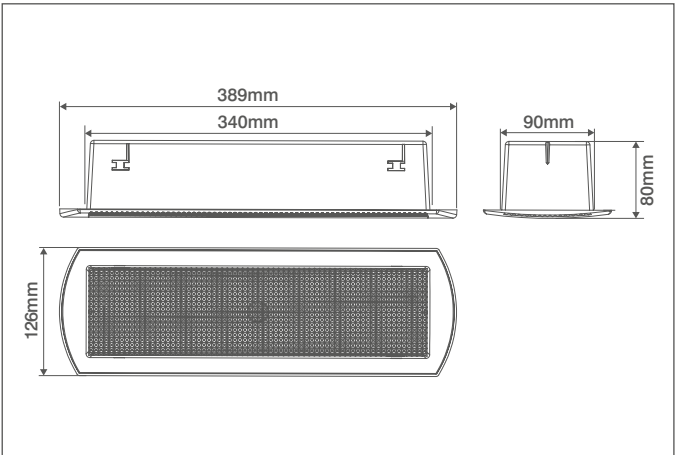


Product Code: OBKO4

Luckinslive 438592258

Description: 4W LED IP20 Maintained Self-Test Enable / Disable Flush Emergency Bulkhead – 5500K – White

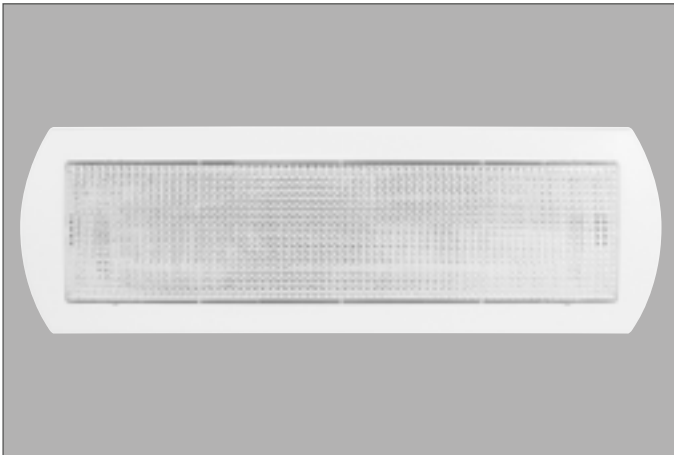

General Information

Dimensions (mm)	389 (L) x 126 (W) x 80 (D)
Materials	Housing: Polycarbonate; Diffuser: Polycarbonate
Colour	White
Product Weight (Kg)	0.76
Cutout Dimensions (mm)	340 x 90
Recess Depth (mm)	70
Ingress Protection	IP20
Self-Test Facility	Facility to Enable or Disable
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	II
Circuit Wattage (W)	4
LED Wattage (W)	4
Operation Mode	Maintained or Non-maintained
Cable Entry	Rear Ø20mm Entry
Operating Temperature (°C)	0 to +40
Maximum Critical Temperature (°C)	+70

Luminaire Output

Colour Temperature (K)	5500
Typical Luminous Flux (lm)	200
Beam Angle (°)	100
LED Lifetime (L70) (Hours)	30000

Emergency Backup Information

Self-Test Facility	Facility to Enable or Disable
Emergency Luminous Flux (lm)	150
Battery Specification	3.2V 1800mAh Lithium (LiFePO4) Battery
Minimum Duration (Hours)	3

Compatible Accessories

OBKB3218 - 3.2V 1800mAh Lithium (LiFePO4) Battery With 15cm Fly Lead
--



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | W: oviaUK.com



CLICK OR SCAN

Catalogue



Section



DoC



Installation



CLICK OR SCAN