


Product Code: OBKS3S-B

Luckinslive 438592339

Description: 2.5W LED IP40 Square Non-Maintained Self-Test Enable / Disable Emergency Ceiling Light – 6500K - Black

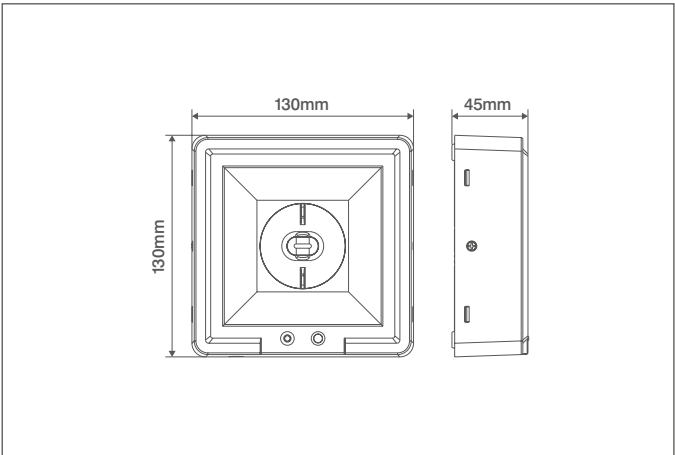

General Information

Dimensions (mm)	130 (L) x 130 (W) x 45 (D)
Materials	Housing: Polycarbonate; Lens: Polycarbonate
Colour	Black
Product Weight (Kg)	0.48
Ingress Protection	IP40
Self-Test Facility	Facility to Enable or Disable
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	I
Circuit Wattage (W)	2.9
LED Wattage (W)	2.9
Input Current	38
Power Factor	0.3
Operation Mode	Non-maintained Only
Driver Output	320mA
Operating Temperature (°C)	0 to +40

Luminaire Output

Colour Temperature (K)	6500		
Colour Rendering Index (CRI)	≥70		
LED Lifetime (L70) (Hours)	50000		
Lens Type	Corridor	Corridor Wide	Open Area
Beam Angle (°)	38	161	170
Emergency Luminous Flux	173	180	147

Emergency Backup Information

Self-Test Facility	Facility to Enable or Disable
Battery Specification	3.2V 3000mAh Li-FePO4
Minimum Duration (Hours)	3

Compatible Accessories

OBKB3230D - 3.2V 3000mAh Lithium (LiFePO4) Battery
--



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | W: oviaUK.com



CLICK OR SCAN

Catalogue



Section



DoC



Installation



CLICK OR SCAN