


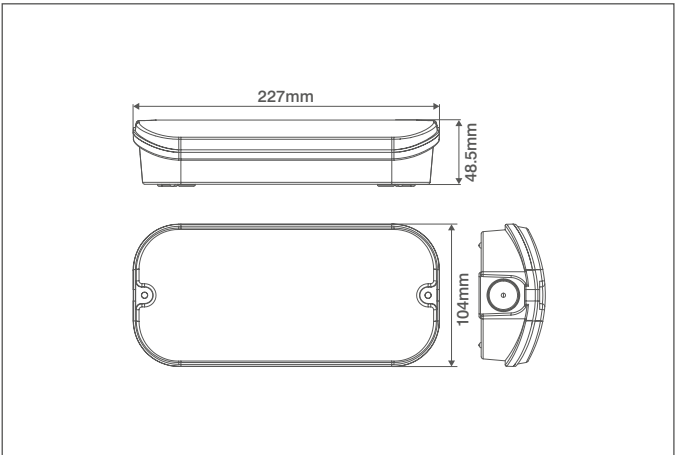

General Information

Dimensions (mm)	215 (L) x 46 (W) x 100 (H)
Materials	Housing: Polycarbonate; Diffuser: Polycarbonate
Colour	White
Product Weight (Kg)	0.356
Ingress Protection	IP65
Self-Test Facility	Facility to Enable or Disable
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Circuit Wattage (W)	3
LED Wattage (W)	3
Power Factor	0.55
Operation Mode	Maintained or Non-maintained
Driver Output	382mA
Operating Temperature (°C)	0 to +40
Maximum Critical Temperature (°C)	+70

Luminaire Output

Colour Temperature (K)	5500
Typical Luminous Flux (lm)	151
Beam Angle (°)	110
Colour Render Index (CRI)	>80
LED Lifetime (L70) (Hours)	30000

Emergency Backup Information

Self-Test Facility	Facility to Enable or Disable
Emergency Luminous Flux (lm)	107
Battery Specification	3.2V 1800mAh Lithium (LiFePO4) Battery
Minimum Duration (Hours)	3

Compatible Accessories

OBKB3218 - 3.2V 1800mAh Lithium (LiFePO4) Battery With 15cm Fly Lead
--

