




Product Code: OEO15

Luckinslive 438301575

Description: 10/13/15W Power Switchable LED Bulkhead Standard IP65 CCT White

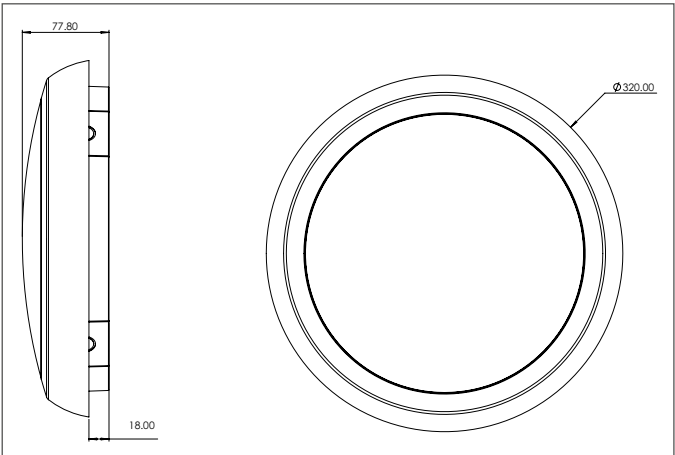

General Information

Dimensions (mm)	320 (Dia.) x 78 (D)
Materials	Base & Diffuser: Polycarbonate (UV Stabilised); Gear Tray: Powder Coated Steel; LED Array: Aluminium Substrate
Bezel Colour	White (RAL9010)
Product Weight (Kg)	0.84
Ingress Protection	IP65
Impact Rating (IK)	10
Mounting	Ceiling or Wall
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	II
Power Switchable	Yes
Circuit Wattage (W)	10/13/15
LED Wattage (W)	10/13/15
Input Current (mA)	140
Inrush Current	10A (150uS)
Power Factor	>0.5
Efficiency (%)	90
Driver Information	Integrated
Operating Temperature (°C)	-20 to +40
Maximum Critical Temperature (°C)	85
Input Terminations	3 Pole Push-fit Terminals

Luminaire Output

Colour Temperature (K)	3000	4000	6000
LED Wattage	10		
Typical Luminous Flux (lm)	1200	1200	1200
Efficacy (lm/W)	120	120	120
LED Wattage	13		
Typical Luminous Flux (lm)	1560	1560	1560
Efficacy (lm/W)	120	120	120
LED Wattage	15		
Typical Luminous Flux (lm)	1800	1800	1800
Efficacy (lm/W)	120	120	120
Beam Angle (°)	120		
Colour Rendering Index (CRI)	>80		
Flicker Free	Yes		
Energy Classification	D		
LED Lifetime (L70) (Hours)	50000		

Dimming Information

Dimmable	No
----------	----



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | W: oviaUK.com



CLICK OR SCAN

Catalogue



Section



DoC



Installation



CLICK OR SCAN