



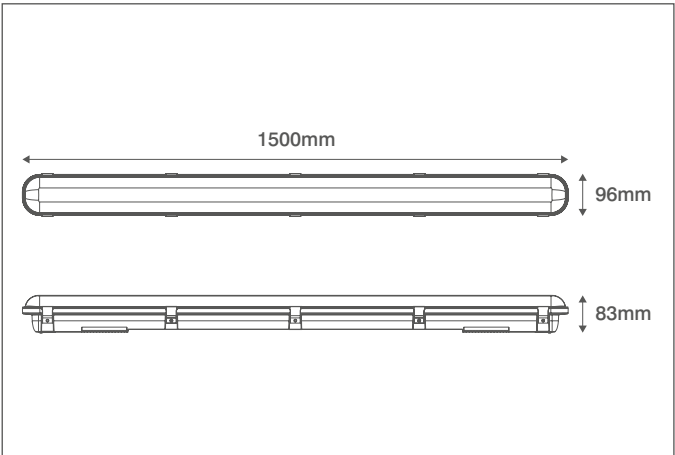

Product Code: OU540-E-CF

Luckinslive 438098875

Description: 40W 1500mm Linear LED Luminaire 4000K With Microwave Sensor Having Corridor Function & Emergency IP65

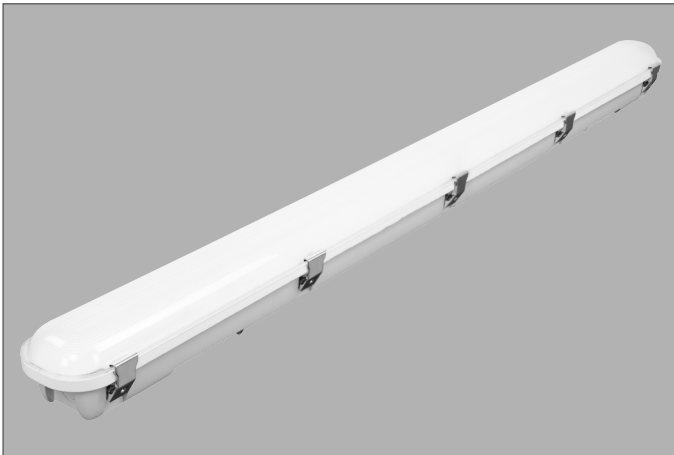

General Information

Dimensions (mm)	1500 (L) x 96 (W) x 83 (D)
Materials	Base: Polycarbonate Diffuser: Polycarbonate Diffuser Fixing Clips: Stainless Steel
Base Finish	Light Grey
Product Weight (Kg)	2.25
Ingress Protection	IP65
Impact Rating (IK)	08
Mounting	Ceiling or Wall
Warranty (Years)	5
Battery Warranty (Years)	4

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	I
Circuit Wattage (W)	42
LED Wattage (W)	40
Input Current (mA)	210
Inrush Current/Time	20A (166µs)
Power Factor	>0.9
Operating Temperature (°C)	0 to +40
Critical Temperature (°C)	85
Driver Information	Integrated
Input Terminations	Push-fit Terminals
Cable Input Accessories	20mm IP65 Nylon Gland Supplied

Luminaire Output

Colour Temperature (K)	4000
Colour Render Index (CRI)	80
Beam Angle (°)	120
Flicker Free	Yes
Emergency Luminous Flux (lm)	300
LED Lifetime (L70) (Hours)	50000

Sensor Information

Installation Height (m)	2.5 to 6
Detection Area Settings (%)	25 / 50 / 75 / 100
Daylight Threshold Settings (Lux)	2 / 10 / 30 / 50 / Disable
Master/Slave Facility	Up to 400W
Hold Time Settings	5s / 30s / 90s / 5min. / 20min. / 30min.

Emergency Backup Information

Emergency Luminous Flux (lm)	300
Battery Specification	6.4V 1600mAh LiFePO4
Minimum Duration (Hours)	3
Battery Warranty (Years)	4

Dimming Information

Dimming Format	Corridor Function
Corridor Dimming Levels (%)	10



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | W: oviaUK.com



CLICK OR SCAN

Catalogue



Section



DoC



Installation



CLICK OR SCAN