
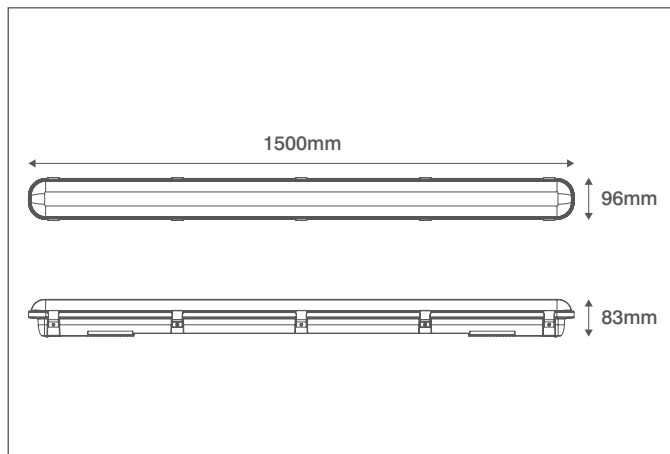


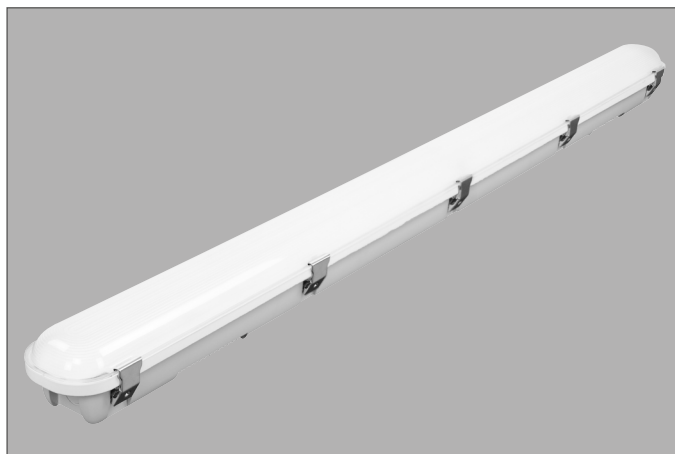

General Information

Dimensions (mm)	1500 (L) x 96 (W) x 83 (D)
Materials	Base: Polycarbonate
	Diffuser: Polycarbonate
	Diffuser Fixing Clips: Stainless Steel
Base Finish	Light Grey
Product Weight (Kg)	1.95
Ingress Protection	IP65
Impact Rating (IK)	08
Mounting	Ceiling or Wall
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	I
Circuit Wattage (W)	20/27/34/40
Input Current (A)	195
Inrush Current	20A (166µs)
Power Factor	>0.9
Operating Temperature (°C)	-20 to +40
Maximum Critical Temperature (°C)	85
Input Terminations	Push-fit Terminals
Cable Input Accessories	20mm IP65 Nylon Gland Supplied
LED Driver	Integrated

Compatible Accessories

OVEMU2 - Emergency Converter
OVEMB6416LIS - 6.4V 1600mAh LiFePo4 Battery - Serial
OVMWU400 - Microwave Sensor

Luminaire Output

LED Wattage	20	27	34	40
Circuit Wattage	20	27	34	40
Typical Luminous Flux	3200	4320	5440	6400
Efficacy	160	160	160	160
Beam Angle (°)	120			
Colour Temperature (K)	4000			
Flicker Free	Yes			
Colour Rendering Index (CRI)	80			
LED Lifetime (L70)	50000			

Dimming Information

Dimmable	No
----------	----

