


Description: 7W Square Up & Down LED Wall Fitting IP54 4000K Grey

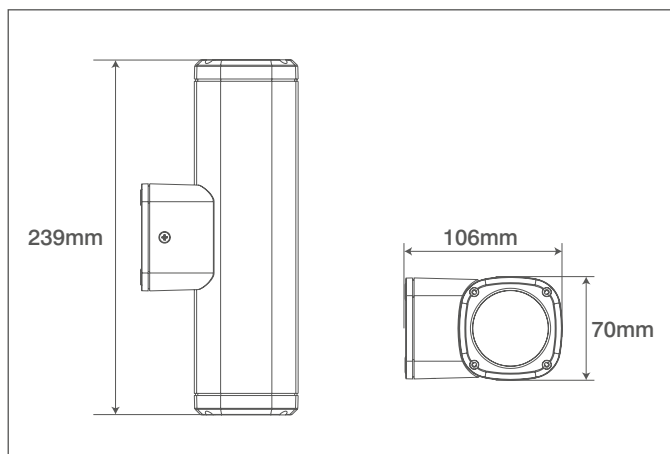

General Information

Dimensions (mm)	70 (W) x 106 (D) x 239 (H)
Materials	Body: Powder Coated Aluminium
Colour	Grey (RAL7024)
Product Weight (Kg)	0.9
Ingress Protection	IP54
Mounting	Wall
Warranty (Years)	3

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	I
Circuit Wattage (W)	2 x 3.5 (7)
LED Wattage (W)	2 x 3.5 (7)
Inrush Current/Time	<30A (<0.5s)
Power Factor	>0.85
Operating Temperature (°C)	-20 to +50
Critical Temperature (°C)	+85
Driver Information	Integrated
Input Terminations	Terminal Block (Screw Terminals)

Luminaire Output

Colour Temperature (K)	4000
Colour Render Index (CRI)	>80
Typical Luminous Flux (lm)	2 x 300 (600)
Efficacy (lm/W)	85
Beam Angle (°)	30 (Top & Bottom)
Flicker Free	Yes
LED Lifetime (L70) (Hours)	50000

Dimming Information

Dimmable	No
----------	----

OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

