INCEPTOR® MURUS

Technical Specification

Product Code: OV2071AG25EMPC **Luckinslive 433364698**

Description: 25W LED Wall Pack Standard With Emergency & Photocell IP66 CCT Anthracite Grey

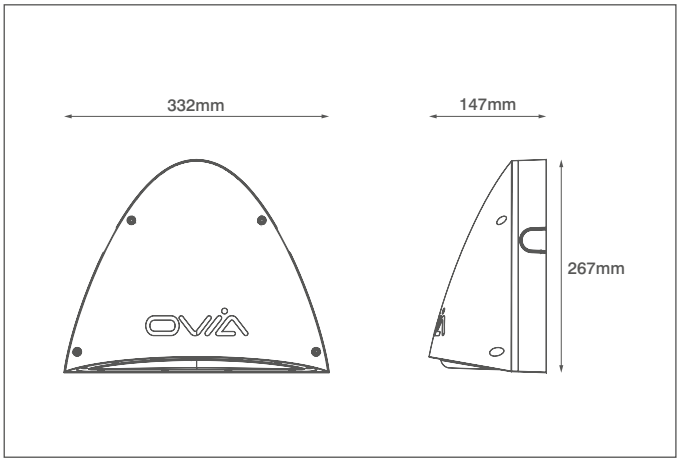

General Information

Dimensions (mm)	267.4 (W) x 147 (D) x 332.6 (H)
Materials	Base & Cover: Powder Coated Aluminium; Diffuser: Polycarbonate
Colour	Anthracite Grey (RAL7016)
Product Weight (Kg)	3.18
Ingress Protection	IP66
Impact Rating (IK)	10
Mounting	Wall
Warranty (Years)	5
Battery Warranty (Years)	4
On Site Warranty	1 Year Unregistered, 2 Year Registered (https://oviauk.com/on_site_warranty)

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Surge Protection Installed	Yes
Circuit Wattage (W)	27
LED Wattage (W)	25
Input Current (mA)	0.109
Inrush Current	15A (183µS)
Power Factor	>0.9
Driver Information	Integrated (Tridonic)
Operating Temperature (°C)	0 to +50
Maximum Critical Temperature (°C)	+80
Input Terminations	4 Pole Push-fit Terminals

Luminaire Output

Colour Temperature (K)	3000	4000	6000
Typical Luminous Flux (lm)	2500	3000	2500
Efficacy (lm/W)	86	103	86
Beam Angle (°)	80 x 140		
Emergency Luminous Flux (lm)	410	410	410
Colour Rendering Index (CRI)	>80		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	50000		

Dimming Information

Dimmable	No

Sensor Information

Ambient Light 'On' (Lux)	10 to 20
Ambient Light 'OFF' (Lux)	30 to 60

Emergency Backup Information

Emergency Luminous Flux (lm)	410
Battery Specification	Li-Ion 2600mAh 3.7V
Minimum Duration (Hours)	3
Battery Warranty (Years)	4

Compatible Accessories

OVEMB6415LIS - 6.4V 1500mAh LiFePo4 Battery – Serial



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | **W:** oviaUK.com

Catalogue Section DoC Installation