


INCEPTOR® MURUS

Technical Specification

Product Code: OV2071LG15EMPC

Luckinslive 433364740

Description: 15W LED Wall Pack Standard With Emergency & Photocell IP66 CCT Light Grey

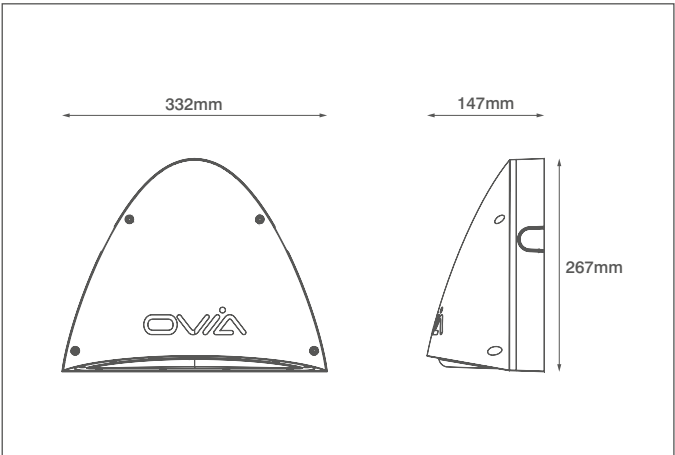

General Information

Dimensions (mm)	267.4 (W) x 147 (D) x 332.6 (H)
Materials	Base & Cover: Powder Coated Aluminium; Diffuser: Polycarbonate
Colour	Light Grey (RAL7037)
Product Weight (Kg)	3.15
Ingress Protection	IP66
Impact Rating (IK)	10
Mounting	Wall
Warranty (Years)	5
Battery Warranty (Years)	4
On Site Warranty	1 Year Unregistered, 2 Year Registered (https://oviauk.com/on_site_warranty)

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Surge Protection Installed	Yes
Circuit Wattage (W)	17
LED Wattage (W)	15
Input Current (mA)	0.065
Inrush Current	10A (152µS)
Power Factor	>0.9
Driver Information	Integrated (Tridonic)
Operating Temperature (°C)	0 to +50
Maximum Critical Temperature (°C)	+80
Input Terminations	4 Pole Push-fit Terminals

Luminaire Output

Colour Temperature (K)	3000	4000	6000
Typical Luminous Flux (lm)	1650	1950	1650
Efficacy (lm/W)	86	102	86
Beam Angle (°)	80 x 140		
Colour Rendering Index (CRI)	>80		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	50000		

Dimming Information

Dimmable	No
----------	----

Sensor Information

Ambient Light 'On' (Lux)	10 to 20
Ambient Light 'OFF' (Lux)	30 to 60

Emergency Backup Information

Emergency Luminous Flux (lm)	410
Battery Specification	6.4V 1500mAh LiFePo4
Minimum Duration (Hours)	3
Battery Warranty (Years)	4

Compatible Accessories

OVEMB6415LIS-WP - 6.4V 1500mAh LiFePo4 Battery – Serial



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | W: oviaUK.com



CLICK OR SCAN

Catalogue



Section



DoC



Installation



CLICK OR SCAN