

### General Information

Dimensions	83mm Diameter x 52mm (D)
Materials	Front Bezel: ABS Rear Housing: Powdercoated Steel
Finish	Polished Chrome
Product Weight	0.165Kg
Cutout	70-75mm Diameter
Dimmable	Yes
Ingress Protection	IP65
Warranty	2 Years

### Supply & Power


Input Voltage & Frequency	220-240V~ 50/60Hz
Electrical Safety	Class II (Double Insulated)
Circuit Wattage	5.5W
Input Current	32mA
Inrush Current	1.2A (15 $\mu$ s)
Power Factor	0.8
Ambient Temperature (Ta)	-15°C - +40°C
Critical Temperature	+80°C
LED Driver	Integrated

### Accessories

OVSP3120CH	130mm Diameter (75mm Aperture) Converter Plate - Chrome
OVIS1020	Insulation Support Bracket
OVEMCG2305M3	3 Hour Universal Emergency Pack with prewired Flow™ Connectors

### Luminaire Output

Colour Temperature	2700K
CRI	>80
Typical Luminous Flux	340lm
Efficacy	61lm/W
Beam Angle	90°
LED Lifetime (L70)	20,000 Hours

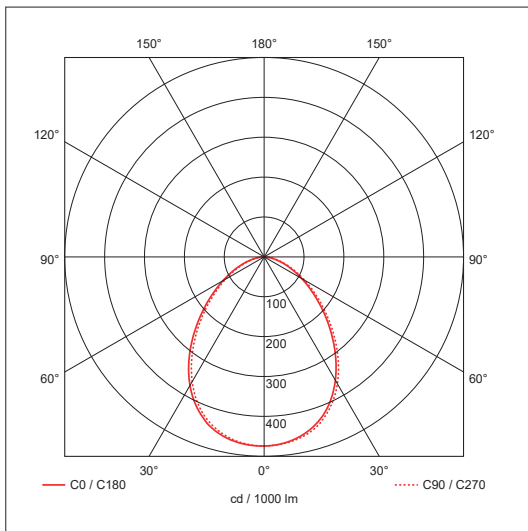

### Additional Approvals

Fire Rating	30 Minutes: 'I' Joists, Metal Web and Solid Timber Joists
	60 Minutes: 'I' Joists, Metal Web and Solid Timber Joists
	90 Minutes: Solid Timber Joists
Acoustic Rating	0dB (zero impact on sound insulation)
Air Flow™	BS 5250: 2011 compliant

