


Product Code: OV6209WW

Luckinslive 407975592

Description: 9W 150mm Diameter LED Downlight IP44 WW White

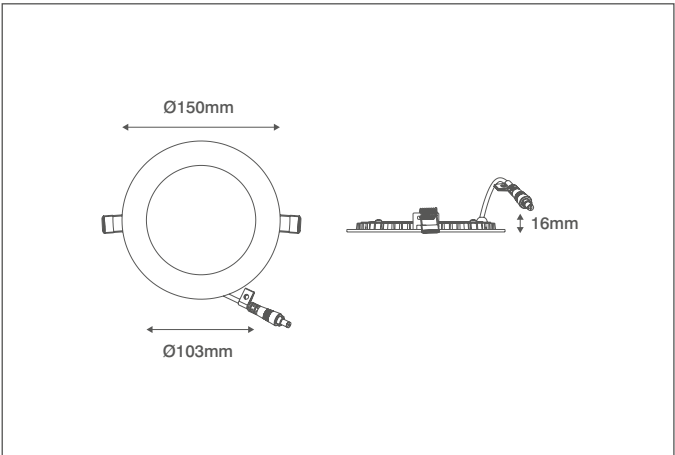

General Information

Dimensions (mm)	150 (Dia.) x 20.5 (D)
Materials	Body: Powder Coated Aluminium; Diffuser: Polystyrene; Light Guide Plate (LGP): Polystyrene
Colour	White (RAL9003)
Product Weight (Kg)	0.21
Cutout Diameter (mm)	135
Recess Depth Without Driver (mm)	16
Ingress Protection	IP44
Maximum Ceiling Thickness (mm)	32
Warranty (Years)	3

Luminaire Output

Colour Temperature (K)	3000
Colour Render Index (CRI)	>80
Typical Luminous Flux (lm)	600
Efficacy (lm/W)	67
Beam Angle (°)	120
LED Lifetime (L70) (Hours)	20000

Dimming Information

Dimmable	No
----------	----

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	II
Circuit Wattage (W)	9
Input Current (mA)	280
Inrush Current/Time	1.5A (<5ms)
Power Factor	>0.5
Operating Temperature (°C)	-5 to +40
Critical Temperature (°C)	+45
Driver Information	Remote Driver Supplied
Prewired Flow™ Connector	3 Pole CT105-F Push-fit Terminals

Compatible Accessories

OVCGMF0003 - 240V~ 12.7-33.7W Multi-function Dimmable Constant Current LED Driver
OEP4 - 3 Hour Emergency Pack
OEP4-ST - 3 Hour Self-Test Emergency Pack
OEP4-DA - 3 Hour 4W DALI Self-Test Emergency Downlight



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | W: oviaUK.com



CLICK OR SCAN

Catalogue



Section



DoC



Installation



CLICK OR SCAN