


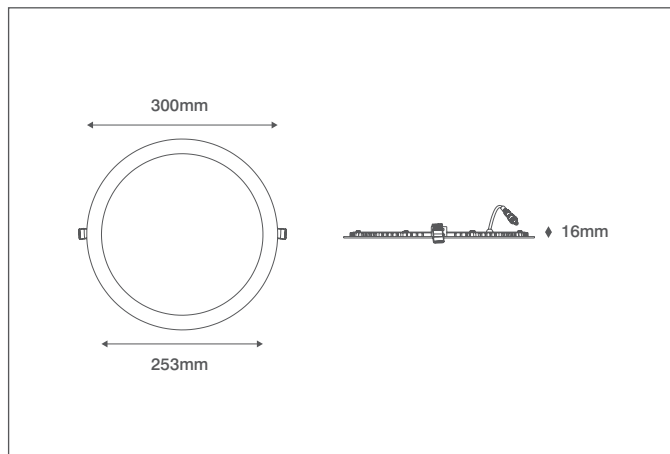

General Information

Dimensions (mm)	300 (Dia.) x 20.5 (D)
Materials	Body: Powdercoated Aluminium; Diffuser: Polystyrene; Light Guide Plate (LGP): Polystyrene
Finish	White (RAL 9003)
Product Weight (Kg)	0.64
Cutout Diameter (mm)	280
Recess Depth Without Driver (mm)	16
Ingress Protection	IP44
Maximum Ceiling Thickness (mm)	32
Warranty (Years)	3

Supply & Power Information

Input Voltage & Frequency (V~ / Hz)	230 50/60
Safety Class	II
Circuit Wattage (W)	24
LED Wattage (W)	24
Input Current (mA)	280
Inrush Current/Time	3A (<5ms)
Power Factor	>0.5
Operating Temperature (°C)	-20 to +40
Critical Temperature (°C)	+45
Driver Information	Remote 3 In 1 Multi-Function Driver Supplied

Luminaire Output

Colour Temperature (K)	3000
Colour Render Index (CRI)	>80
Typical Luminous Flux (lm)	1800
Efficacy (lm/W)	75
Beam Angle (°)	120
Flicker Free	Yes
LED Lifetime (L70) (Hours)	20000

Dimming Information

Dimmable	Yes
Dimming Format	DALI, Switch Dim, 1-10V, 10V PWM
DALI Voltage (V DC)	9.5V to 22.5V
DALI Connectable Driver	Up To 64 Drivers To One DALI Control Line
DALI Line Length Max.	100M Max. - 2 x 0.50mm ² 150M Max. - 2 x 0.75mm ² 200M Max. - 2 x 1.00mm ² 300M Max. - 2 x 1.50mm ²
Switch Dim Control Type	Switch Dim Using Retractive Switch(es)
Switch Dim Voltage	230V~ input to driver
Switch Dim Control Format	Short Press: ON / OFF; Press & Hold: DIM
Analogue Control Type	1-10V / 10V PWM Dimming
Analogue (1-10V) Parameters	Upto 16 drivers with 20 metres maximum between drivers
Analogue (1-10V) Information	An additional isolation switch will be required to turn the driver On and Off

