


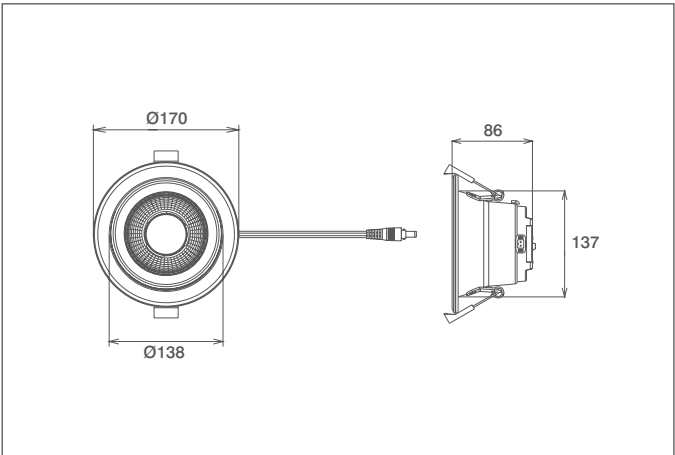

General Information

Dimensions (mm)	170 (Dia.) x 86 (D)
Materials	Bezel: Powder Coated Aluminium; Diffuser & Housing: Polycarbonate
Colour	White (RAL9016)
Product Weight (Kg)	0.26
Cutout Diameter (mm)	140
Recess Depth (mm)	86
Ingress Protection	IP54
Maximum Ceiling Thickness (mm)	20
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	II
Circuit Wattage (W)	13
LED Wattage (W)	13
Input Current (mA)	60
Inrush Current	2.67A (76µs)
Power Factor	>0.9
Driver Information	Remote Driver Supplied
Operating Temperature (°C)	-5 to +45
Maximum Critical Temperature (°C)	+90

Luminaire Output

Colour Temperature (K)	3000	4000	6000
Typical Luminous Flux (lm)	1250	1320	1290
Efficacy (lm/W)	99	105	102
Beam Angle (°)	60		
Colour Rendering Index (CRI)	>80		
Unified Glare Rating (UGR)	<19		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	50000		

Dimming Information

Dimmable	Yes
Dimming Format	Triac

Compatible Accessories

OVCGMF0003 - 240V~ 12.7-33.7W 3 in 1 Multi-function Dimmable Constant Current LED Driver
OEP4 - 3 Hour Emergency Pack
OEP4-ST - 3 Hour Self-Test Emergency Pack
OEP4-DA - 3 Hour 4W DALI Self-Test Emergency Downlight

