
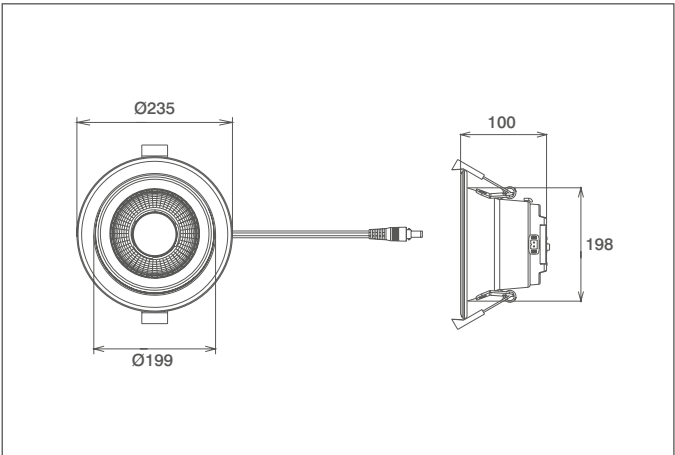


Product Code: OV66258CTAD

Luckinslive 433365192

Description: 25W 235mm Diameter Triac Dimmable LED Downlight With CCT Switch IP54 White

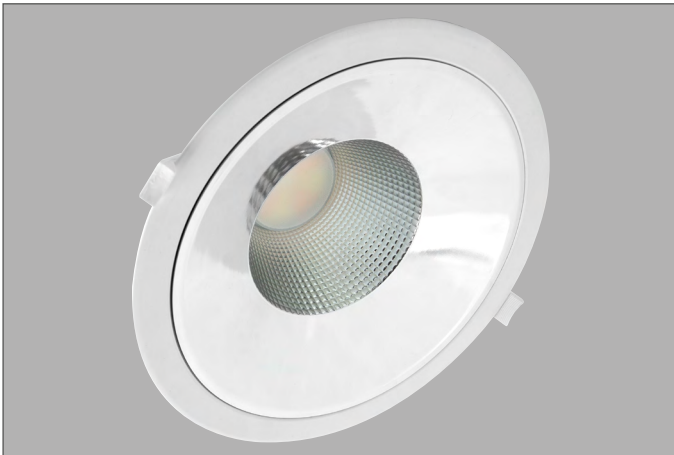

General Information

Dimensions (mm)	235 (Dia.) x 100 (D)
Materials	Bezel: Powder Coated Aluminium; Diffuser & Housing: Polycarbonate
Colour	White (RAL9016)
Product Weight (Kg)	0.52
Cutout Diameter (mm)	200
Recess Depth (mm)	100
Ingress Protection	IP54
Maximum Ceiling Thickness (mm)	20
Warranty (Years)	5

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	II
Circuit Wattage (W)	25
LED Wattage (W)	25
Input Current (mA)	130
Inrush Current	3.06A (224µs)
Power Factor	>0.9
Driver Information	Remote Driver Supplied
Operating Temperature (°C)	-5 to +45
Maximum Critical Temperature (°C)	+90

Luminaire Output

Colour Temperature (K)	3000	4000	6000
Typical Luminous Flux (lm)	2550	2720	2600
Efficacy (lm/W)	102	109	104
Beam Angle (°)	60		
Colour Rendering Index (CRI)	>80		
Unified Glare Rating (UGR)	<19		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	50000		

Dimming Information

Dimmable	Yes
Dimming Format	Triac

Compatible Accessories

OVCGMF0003 - 240V~ 12.7-33.7W 3 in 1 Multi-function Dimmable Constant Current LED Driver
OEP4 - 3 Hour Emergency Pack
OEP4-ST - 3 Hour Self-Test Emergency Pack
OEP4-DA - 3 Hour 4W DALI Self-Test Emergency Downlight



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | W: oviaUK.com



CLICK OR SCAN

Catalogue



Section



DoC



Installation



CLICK OR SCAN