


General Information

| | |
|---------------------|--|
| Dimensions | 595mm (L) x 595mm (W) x 9mm (D) |
| Materials | Frame: Powdercoated Aluminium Diffuser: Polypropylene Light Guide Plate (LGP): Polystyrene |
| Finish | White (RAL 9003) |
| Product Weight | 2.2Kg |
| Dimmable | Yes (DALI) |
| Ingress Protection | IP20 |
| Flammability Rating | TP(a) |
| Warranty | 5 Years |

Accessories

| | |
|-----------|---------------------------------|
| OVEMCG50 | 3 Hour Emergency Pack |
| OVSURF731 | 600mm x 600mm Surface Frame Kit |
| OVREC731 | 600mm x 600mm Recess Frame Kit |
| OVSUSP731 | Suspension Wire Kit |

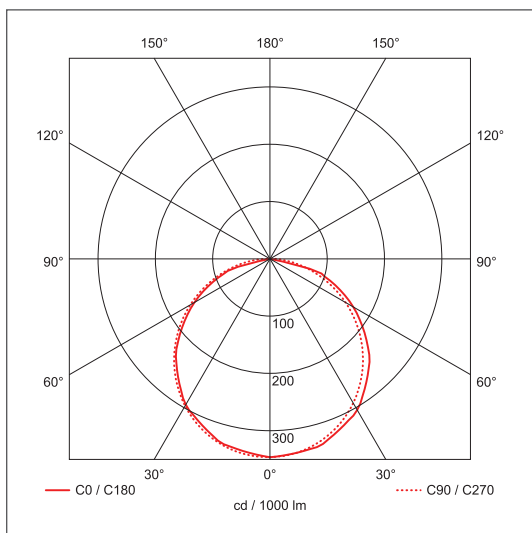

Supply & Power (See Page 2)

| | |
|---------------------------|---|
| Input Voltage & Frequency | 220-240V~ 50/60Hz |
| Electrical Safety | Class II (Double Insulated) |
| Circuit Wattage | 30W |
| Input Current | 138mA |
| In-rush Current | <30A(Twidth=120us measured at 50% Ipeak) @ 230Vac |
| Power Factor | > 0.9 |
| Ambient Temperature (Ta) | -20°C - +40°C |
| Critical Temperature | +75°C |
| LED Driver | Remote Universal DALI Driver Supplied |
| Input Terminations | Push-fit Terminals |

Luminaire Output

| | |
|-----------------------|--------------|
| Colour Temperature | 4000K |
| CRI | > 80 |
| Typical Luminous Flux | 2900lm |
| Efficacy | 97lm/W |
| Beam Angle | 120° |
| LED Lifetime (L70) | 60,000 Hours |
| Flicker Free | Yes |

Additional Information

Suspension hooks pre-fitted to the back

Dimming Facility

| | |
|---------------------------|---|
| DALI | Yes |
| Switch Dim | No |
| 1-10V | No |
| DALI Control Line Voltage | 9.5V to 22.5V |
| Connectable Driver | Up To 64 Drivers To One DALI Control Line |

