


Description: 30W 600mm x 600mm LED Panel WW White

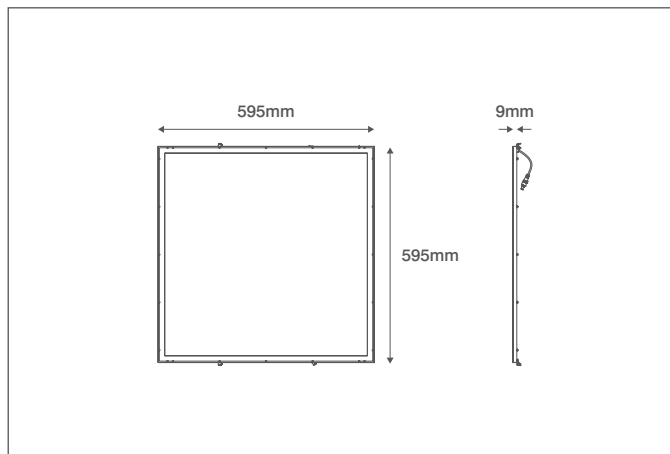

General Information

Dimensions (mm)	595 (L) x 595 (W) x 9 (D)
Materials	Frame: Powder Coated Aluminium; Diffuser: Polypropylene; Light Guide Plate (LGP): Polystyrene
Colour	White (RAL9003)
Product Weight (Kg)	2.2
Ingress Protection	IP20
Flammability Rating	TP(a)
Warranty (Years)	5

Additional Information

Suspension hooks pre-fitted to the back

Compatible Accessories

OVCGMF0001 - 240V~ 29-48W Multi-function Dimmable Constant Current LED Driver

OVSURF731 - 600mm x 600mm Surface Frame Kit

OVREC731 - 600mm x 600mm Recess Frame Kit

OVSUSP731 - Suspension Wire Kit

OEP4 - 3 Hour Emergency Pack

OEP4ST - 3 Hour Self-Test Emergency Pack

Supply & Power Information


Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	II
Circuit Wattage (W)	30
Input Current (mA)	134
Inrush Current/Time	8.06A (230µs)
Power Factor	>0.9
Operating Temperature (°C)	-20 to +40
Critical Temperature (°C)	+75
Driver Information	Remote Driver Supplied
Input Terminations	In To Driver (Screw Terminals)

Luminaire Output

Colour Temperature (K)	3000
Colour Render Index (CRI)	>80
Typical Luminous Flux (lm)	2850
Efficacy (lm/W)	95
Beam Angle (°)	120
LED Lifetime (L70) (Hours)	60000

Dimming Information

Dimmable	No
----------	----

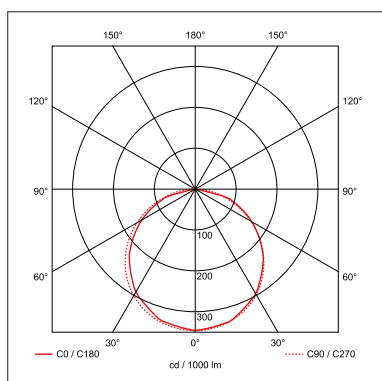

WARRANTY

5

IP20

OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

