


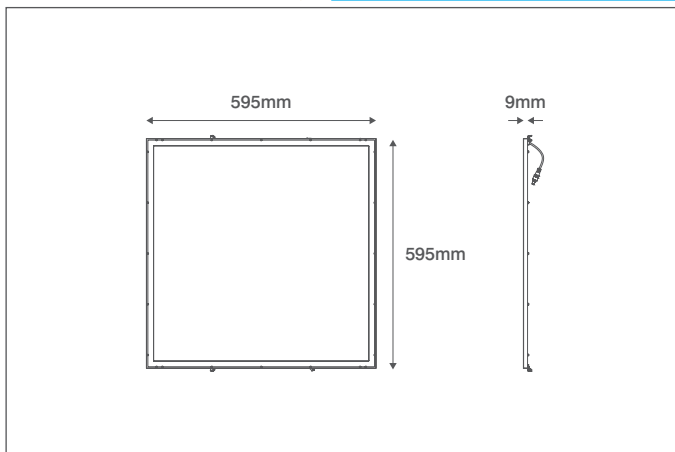


General Information

Dimensions	595mm (L) x 595mm (W) x 9mm (D)
Materials	Frame: Powdercoated Aluminium Diffuser: Polypropylene Light Guide Plate (LGP): Polystyrene
Finish	White (RAL 9003)
Product Weight	2.2Kg
Dimmable	Yes (DALI)
Ingress Protection	IP20
Flammability Rating	TP(a)
Warranty	5 Years

Accessories

OVEMCG50	3 Hour Emergency Pack
OVSURF731	600mm x 600mm Surface Frame Kit
OVREC731	600mm x 600mm Recess Frame Kit
OVSUSP731	Suspension Wire Kit

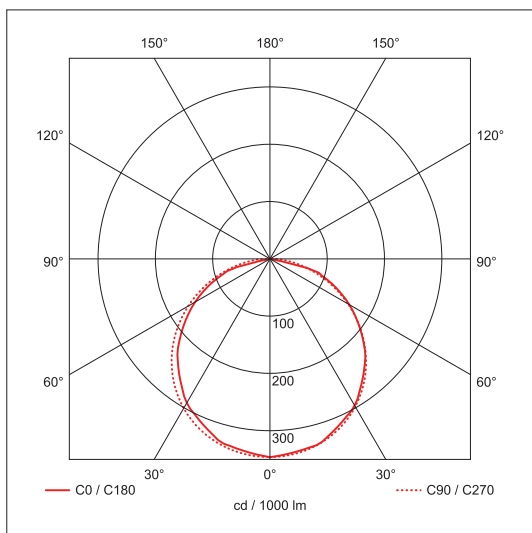

Supply & Power (See Page 2)

Input Voltage & Frequency	220-240V~ 50/60Hz
Electrical Safety	Class II (Double Insulated)
Circuit Wattage	30W
Input Current	134mA
In-rush Current	<30A(Twidth=120us measured at 50% Ipeak) @ 230Vac
Power Factor	> 0.9
Ambient Temperature (Ta)	-20°C - +40°C
Critical Temperature	+75°C
LED Driver	Remote Universal DALI Driver Supplied
Input Terminations	Push-fit Terminals

Luminaire Output

Colour Temperature	3000K
CRI	> 80
Typical Luminous Flux	2850lm
Efficacy	95lm/W
Beam Angle	120°
LED Lifetime (L70)	60,000 Hours
Flicker Free	Yes

Additional Information

Suspension hooks pre-fitted to the back

Dimming Facility

DALI	Yes
Switch Dim	No
1-10V	No
DALI Control Line Voltage	9.5V to 22.5V
Connectable Driver	Up To 64 Drivers To One DALI Control Line

