


Description: 39W 1200mm Linear LED Utility Luminaire With Microwave Sensor & Emergency CW IP65

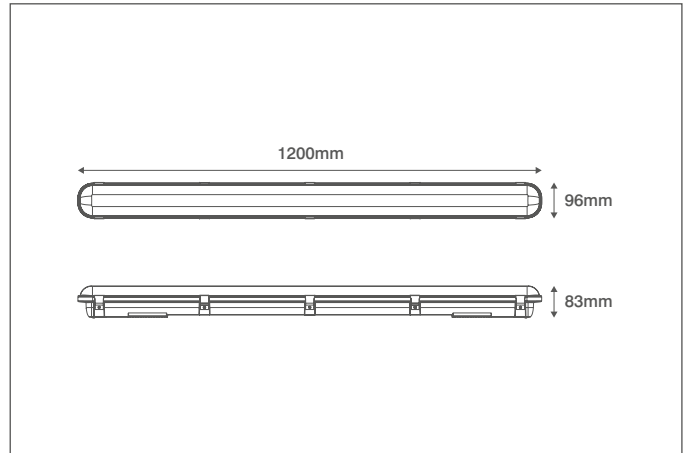

General Information

Dimensions (mm)	1200 (L) x 96 (W) x 83 (D)
Materials	Base: Polycarbonate Frosted Diffuser: Polycarbonate Diffuser Fixing Clips: 304 Grade Stainless Steel
Base Finish	Light Grey
Product Weight (Kg)	1.91
Ingress Protection	IP65
Impact Rating (IK)	08
Mounting	Ceiling, Wall or Suspended
Fixing Components Supplied	Surface and Suspension Brackets
Warranty (Years)	5
Battery Warranty (Years)	4

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	41
LED Wattage (W)	39
Input Current (mA)	115
Inrush Current/Time	3A (264ms)
Power Factor	>0.9
Operating Temperature (°C)	0 to +40
Critical Temperature (°C)	+90
Input Terminations	5 Pole Push Fit Terminals
Cable Input Accessories	20mm IP68 Nylon Gland Supplied

Luminaire Output

Colour Temperature (K)	4000
Colour Render Index (CRI)	>80
Typical Luminous Flux (lm)	4680
Efficacy (lm/W)	114
Beam Angle (°)	105
Emergency Luminous Flux (lm)	650
LED Lifetime (L70) (Hours)	50000

Sensor Information

Mounting Detection Range (m)	14 (Ceiling), 10 (Wall)
Detection Area Settings (%)	10 / 50 / 75 / 100
Minimum Detection Angle (°)	30
Maximum Detection Angle (°)	150
Daylight Threshold Settings (Lux)	2 / 10 / 50 / Disable
HF System	5.8GHz ±75MHz
Master/Slave Facility	Up to 400W
Hold Time Settings	5s / 90s / 5min. 15min.

Emergency Backup Information

Emergency Luminous Flux (lm)	650
Battery Specification	6.4V 3000mAh LiFePo4
Minimum Duration (Hours)	3
Battery Warranty (Years)	4

Dimming Information

Dimmable	No
----------	----

