


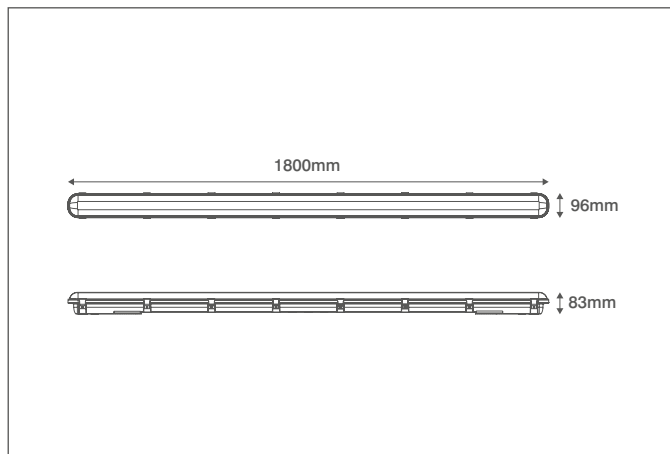

General Information

Dimensions (mm)	1800 (L) x 96 (W) x 83 (D)
Materials	Base: Polycarbonate Frosted Diffuser: Polycarbonate Diffuser Fixing Clips: 304 Grade Stainless Steel
Base Finish	Light Grey
Product Weight (Kg)	2.72
Ingress Protection	IP65
Impact Rating (IK)	08
Mounting	Ceiling, Wall or Suspended
Fixing Components Supplied	Surface and Suspension Brackets
Warranty (Years)	5
Battery Warranty (Years)	4

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	72
LED Wattage (W)	70
Input Current (mA)	115
Inrush Current/Time	3A (264ms)
Power Factor	>0.9
Operating Temperature (°C)	0 to +40
Critical Temperature (°C)	+90
Input Terminations	4 Pole Push Fit Terminals
Cable Input Accessories	20mm IP68 Nylon Gland Supplied

Additional Information

DALI dimmable driver

Luminaire Output

Colour Temperature (K)	4000
Colour Render Index (CRI)	>80
Typical Luminous Flux (lm)	8400
Efficacy (lm/W)	117
Beam Angle (°)	105
Emergency Luminous Flux (lm)	700
LED Lifetime (L70) (Hours)	50000

Emergency Backup Information

Emergency Luminous Flux (lm)	700
Battery Specification	6.4V 3000mAh LiFePo4
Minimum Duration (Hours)	3
Battery Warranty (Years)	4

Dimming Information

Dimmable	Yes
Dimming Format	DALI
Dimming Input Termination	2 DALI Terminals
Analogue (1-10V) Information	See driver for information



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,

Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

