
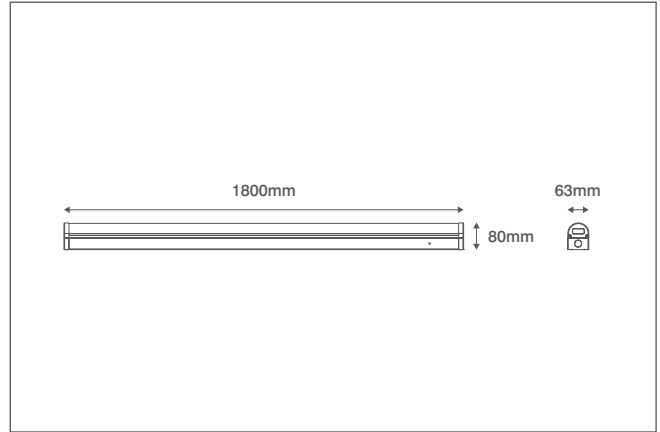


# INCEPTOR® B-LITE

## Technical Specification

Product Code: OV82180EM

Description: 50-75W 1800mm Linear Batten Multi-Current LED Light - Emergency

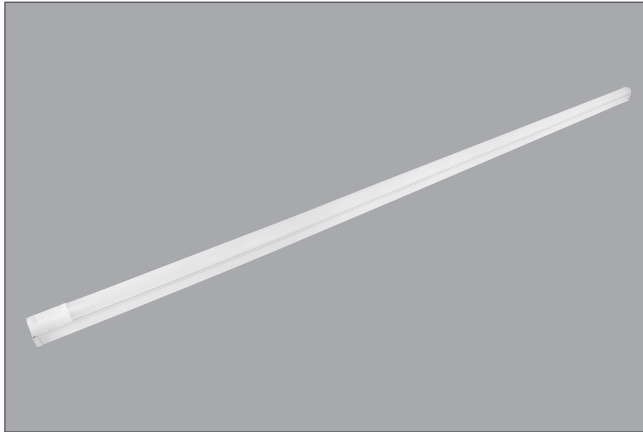

### General Information

Dimensions	1800mm (L) x 63mm (W) x 80mm (D)
Materials	Base: Powdercoated Steel Opaque Diffuser: Polycarbonate
Base Finish	White (RAL 9010)
Product Weight	2.15Kg
Dimmable	No
Ingress Protection	IP20
Flammability Rating	TP(a)
Warranty	5 Years (4 Years Battery)

### Luminaire Output

Circuit Wattage	54W	62W	68W	74W
Typical Luminous Flux	5250lm	6090lm	6720lm	7350lm
Efficacy	97lm/W	98lm/W	98lm/W	99lm/W
Emergency Luminous Flux	280lm			
Colour Temperature	4000K			
CRI	> 80			
Beam Angle	120°			
Flicker Free	Yes			
LED Lifetime (L70)	50,000 Hours			

### Supply & Power


Input Voltage & Frequency	220-240V ~ 50Hz
Electrical Safety	Class II (Double Insulated)
LED Wattage	50W/58W/64W/70W
Circuit Wattage	54W/62W/68W/74W
Input Current	360mA
Inrush Current	0.36A (<0.5S)
Power Factor	>0.9
Ambient Temperature (Ta)	0°C - +45°C
Critical Temperature	+80°C
Terminations	4 Pole Push Fit Terminal Block

### Emergency Information


Installation Requirements	Can be wired as maintained or non-maintained
Battery Specification	6.4V 1500mAh LiFePo4
Emergency Duration	3 Hours Minimum
Battery Warranty	4 Years
Emergency Light Level	280lm

### Accessories


OVEMB6415LIS	6.4V 1500mAh LiFePo4 Parallel Battery - Serial
--------------	--

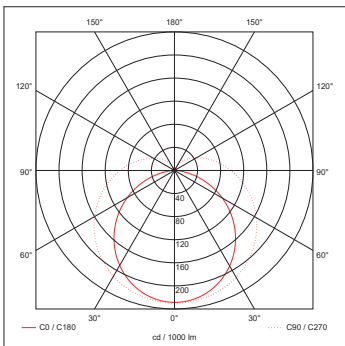


54W

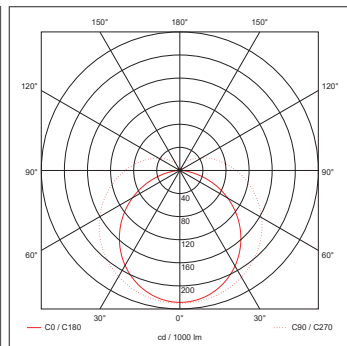

62W

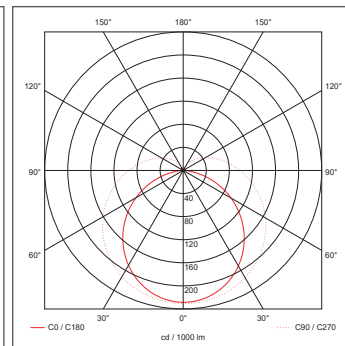

68W

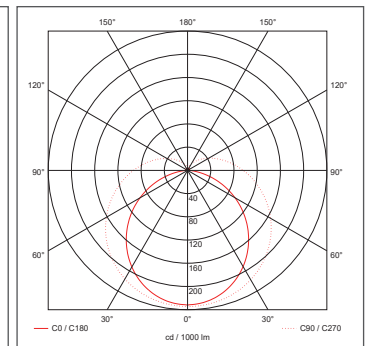

74W



Ovia Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com