



INCEPTOR® B-LITE

Technical Specification

Product Code: OV82180EMDA

Luckinslive 433365558

Description: 70W 1800mm Linear LED Batten With Emergency & DALI

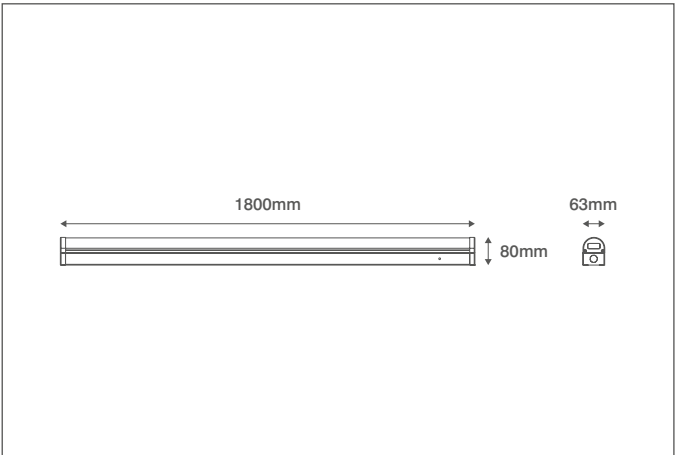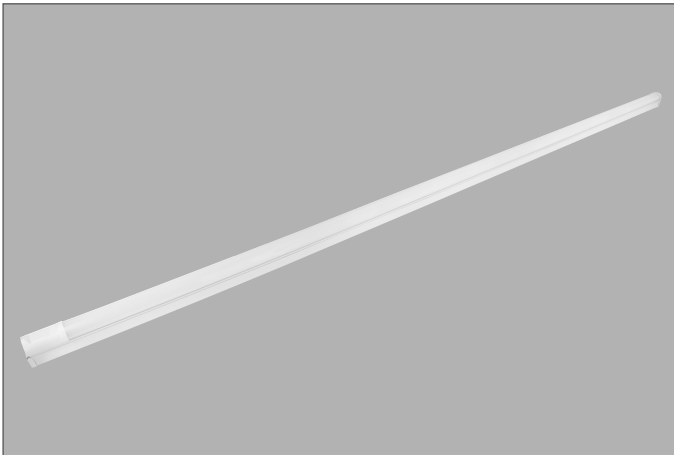

General Information

Dimensions (mm)	1800 (L) x 63 (W) x 80 (D)
Materials	Base: Powder Coated Steel; Opaque Diffuser: Polycarbonate
Colour	(RAL9003)
Base Finish	White
Product Weight (Kg)	2.15
Ingress Protection	IP20
Impact Rating (IK)	08
Flammability Rating	TP(a)
Mounting	Ceiling or Wall
Warranty (Years)	5
Battery Warranty (Years)	4
On Site Warranty	1 Year Unregistered, 2 Year Registered (https://oviauk.com/on_site_warranty)

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	74
LED Wattage (W)	70
Input Current (mA)	360
Inrush Current/Time	0.36A (<0.5S)
Power Factor	>0.9
Operating Temperature (°C)	0 to +45
Critical Temperature (°C)	+80
Input Terminations	4 Pole Push Fit Terminals

Additional Information

DALI dimmable driver
DALI versions are not as standard

Compatible Accessories

OSUSS15 - 2 x Suspension Cable for Linear Luminaires

Luminaire Output

Colour Temperature (K)	4000
Colour Render Index (CRI)	>80
Efficacy (lm/W)	99
Beam Angle (°)	120
Flicker Free	Yes
Emergency Luminous Flux (lm)	280
LED Lifetime (L70) (Hours)	50000

Emergency Backup Information

Emergency Luminous Flux (lm)	280
Battery Specification	6.4V 1500mAh LiFePo4
Minimum Duration (Hours)	3
Battery Warranty (Years)	4

Dimming Information

Dimmable	Yes
Dimming Format	DALI
Dimming Input Termination	2 DALI Terminals
Analogue (1-10V) Information	See driver for information



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 300640
E: sales@oviaUK.com | W: oviaUK.com



CLICK OR SCAN

Catalogue



Section



DoC



Installation



CLICK OR SCAN