

### General Information

Dimensions	1127mm (L) x 34mm (H) x 24mm (D)
Materials	Body: Polycarbonate Diffuser: Polycarbonate
Finish	White (RAL 9016)
Product Weight	0.213Kg
Dimmable	No
Ingress Protection	IP20
Warranty	3 Years

### Supply & Power


Input Voltage & Frequency	220-240V~ 50Hz
Electrical Safety	Class II (Double Insulated)
Circuit Wattage	15W
Input Current	150mA
Power Factor	>0.5
Ambient Temperature (Ta)	-30°C - +40°C
Input Mains Cable	2 x 0.75mm <sup>2</sup> H03VVH2-F - 1 Metre (Supplied)
Number Fitted Together	6 Units (If Mixed Sizes Then Total Wattage Must Not Exceed 100W)

### Luminaire Output


Colour Temperature	3000K	4000K
Typical Luminous Flux	1326lm	1371lm
Efficacy	90lm/W	90lm/W
Beam Angle	130°	
CRI	>80	
LED Lifetime (L70)	35,000 Hours	

### Accessories

OVLL89250	250mm Link Lead For Cubi Undercupboard Lights
OVLL89500	500mm Link Lead For Cubi Undercupboard Lights
OVLL891000	1000mm Link Lead For Cubi Undercupboard Lights

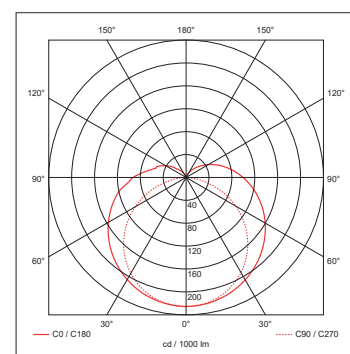

3000K

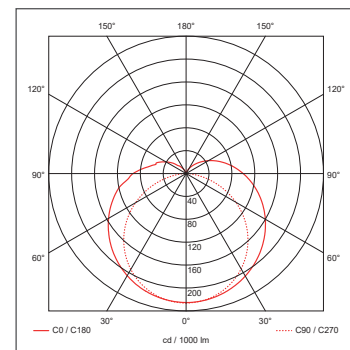

4000K

