


# EVO DECO XL

## Technical Specification

Product Code: OV9800WHDA

Luckinslive 435974251

Description: 20W LED Bulkhead Standard With DALI IP54 CCT White

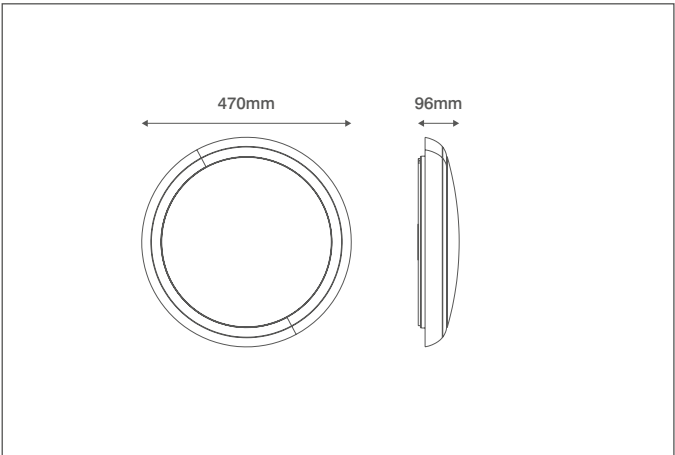

### General Information

|                     |                                                                                |
|---------------------|--------------------------------------------------------------------------------|
| Dimensions (mm)     | 470 (Dia.) x 96 (D)                                                            |
| Materials           | Base & Diffuser: Polycarbonate (UV Stabilised); LED Array: Aluminium Substrate |
| Colour              | White (RAL9010)                                                                |
| Product Weight (Kg) | 1.67                                                                           |
| Ingress Protection  | IP54                                                                           |
| Impact Rating (IK)  | 08                                                                             |
| Flammability Rating | UL94-V2                                                                        |
| Mounting            | Ceiling or Wall                                                                |
| Warranty (Years)    | 5                                                                              |

### Supply & Power Information

|                                        |                           |
|----------------------------------------|---------------------------|
| Continuous Operating Voltage (AC) (Hz) | 220-240 (50/60)           |
| Safety Class                           | II                        |
| Circuit Wattage (W)                    | 20                        |
| LED Wattage (W)                        | 20                        |
| Input Current (mA)                     | 200                       |
| Power Factor                           | >0.95                     |
| Driver Information                     | Integrated                |
| Operating Temperature (°C)             | -15 to +50                |
| Maximum Critical Temperature (°C)      | +90                       |
| Input Terminations                     | 3 Pole Push Fit Terminals |

### Luminaire Output

|                              |       |      |      |
|------------------------------|-------|------|------|
| Colour Temperature (K)       | 3000  | 4000 | 6000 |
| Typical Luminous Flux (lm)   | 1700  | 1900 | 1950 |
| Efficacy (lm/W)              | 85    | 95   | 97   |
| Beam Angle (°)               | 110   |      |      |
| Colour Rendering Index (CRI) | >80   |      |      |
| LED Lifetime (L70) (Hours)   | 30000 |      |      |

### Dimming Information

|                |      |
|----------------|------|
| Dimmable       | Yes  |
| Dimming Format | DALI |



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,  
Tamworth, Staffordshire, B79 7UL United Kingdom  
T: +44 (0)1827 300640  
E: sales@oviaUK.com | W: oviaUK.com



CLICK OR SCAN

Catalogue



Section



DoC



Installation



CLICK OR SCAN