


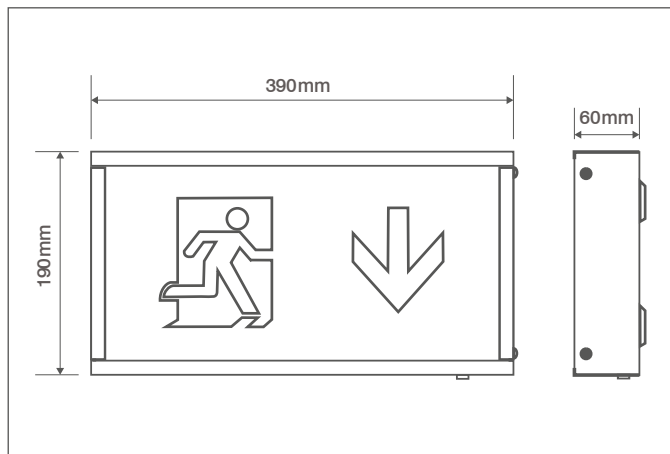

General Information

Dimensions (mm)	390 (W) x 60 (D) x 190 (H)
Materials	Housing: Powder Coated Steel; Sign: Acrylic
Colour	White
Product Weight (Kg)	1.5
Ingress Protection	IP20
Warranty (Years)	4

Supply & Power Information

Continuous Operating Voltage (AC) (Hz)	220-240 (50/60)
Safety Class	I
Circuit Wattage (W)	4
Operation Mode	Maintained or Non-maintained
Cable Entry	2 x Ø20mm Knockouts
Operating Temperature (°C)	0 to +40
Maximum Critical Temperature (°C)	+70

Luminaire Output

Colour Temperature (K)	5500
Typical Luminous Flux (lm)	45
Beam Angle (°)	100
Viewing Distance (M)	34
LED Lifetime (L70) (Hours)	30000

Emergency Backup Information

Emergency Luminous Flux (lm)	40
Battery Specification	3.6V 1500mAh Ni-Cd Battery - Parallel
Minimum Duration (Hours)	3

Compatible Accessories

OVEMB3615NCP - 3.6V 1500mAh Ni-Cd Battery - Parallel
--



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com



Catalogue



Section



DoC



Installation

