
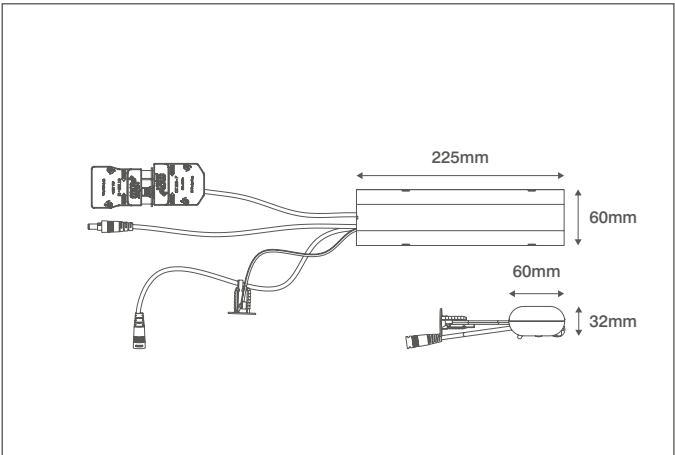


# EMERGENCY CONTROL GEAR

## Technical Specification

Product Code: OVEMCG50

Description: 3 Hour Emergency Conversion Pack For Use With LED Panels

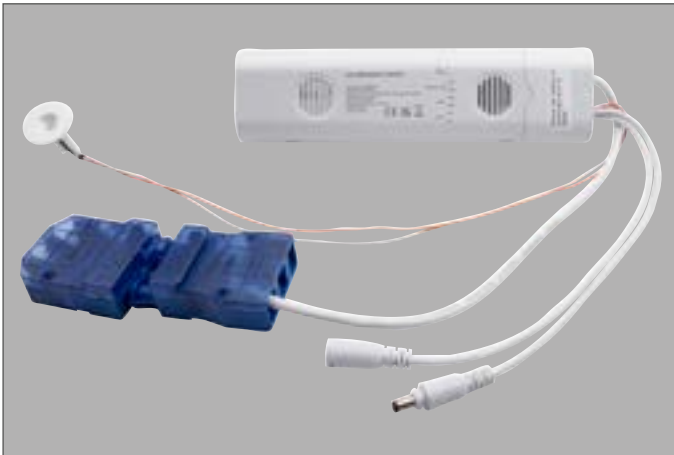

### General Information

Dimensions (mm)	225 (L) x 60 (W) x 32 (D)
Materials	Housing: Polycarbonate
Product Weight (Kg)	0.5
Ingress Protection	IP20
Warranty (Years)	4

### Supply & Power Information

Input Voltage & Frequency (V~ / Hz)	220-240 50/60
Safety Class	II
Power Consumption (W)	4
Output Current (mA)	640-1000
Charge Current (mA)	170-280
Charge Time Minimum (Hours)	24
Battery (Cells)	4
Rated Power (W)	4
Operating Temperature (°C)	0 to +50
Maximum Critical Temperature (°C)	+70
Prewired Flow™ Connector	CT203C - 4 Pole Connector with Fast-Fit Cord Grip

### Emergency Backup Information

Installation	Can be wired as maintained or non-maintained
Minimum Duration (Hours)	3

### Compatible Fittings

OVIA LED panels & AluPanel (excluding 24W) fittings
---



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,  
Tamworth, Staffordshire, B79 7UL United Kingdom  
T: +44 (0)1827 300640  
E: sales@oviaUK.com | W: oviaUK.com



DoC



Installation

