


INCEPTOR® INTENSE

Technical Specification

Product Code: OVSSL512165

Description: 5 Pin 1M Flexible Driver Connection Lead For 12mm IP65 LED Strip – RGBW

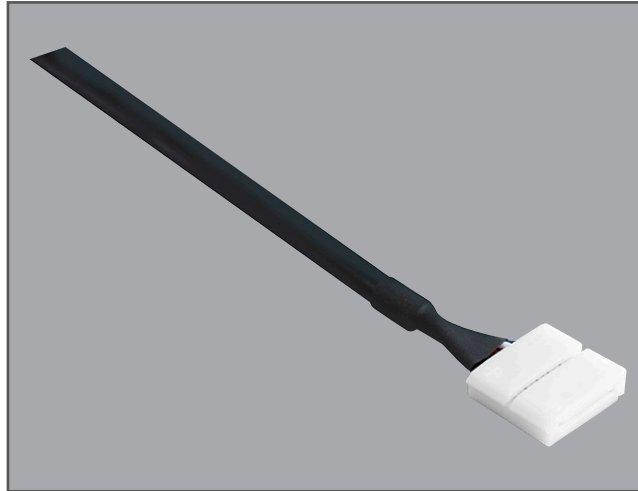

General Information

| | |
|--------------------|---|
| Dimensions | 16.5mm (W) x 4.6mm (D) x 1000mm (L) |
| Materials | Connector Body: Flame Retardant Nylon Heat Shrink Tubing: EVA Contacts: Brass |
| Product Weight | 0.055Kg |
| Ingress Protection | IP65 |
| Cable Size | 5 Core 22 AWG |
| Warranty | 3 Years |

Supply & Power

| | |
|---------------------------|------------------|
| Input Voltage & Frequency | 24V DC |
| Electrical Safety | Class III (SELV) |
| Input Power | |
| Ambient Temperature (Ta) | 0°C - +80°C |

Compatible LED Strip

| | |
|--------------|---------------------|
| 7.2W/M IP65 | RGBW 12mm LED Strip |
| 14.4W/M IP65 | RGBW 12mm LED Strip |

15mmØ Heat Shrink Sleeving (Supplied)

| | |
|------------------------------|----------------|
| Length | 200mm |
| Shrink Ratio | 4:1 |
| Operating Temperature | -45°C - +105°C |
| Shrinkage Temperature (Min.) | 125°C |
| Shrinkage Temperature (Max.) | 200°C |



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com