essentials™

Technical Specification


Product Code: PRC1440-2

Description: 6A 4 Pole Fast Fit Plug-in Ceiling Rose







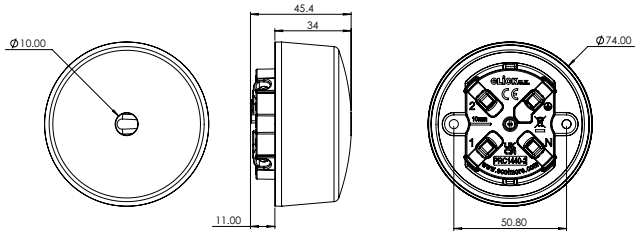

General Information

Dimensions (mm)	74 (Dia) x 45.4 (D)		
Colour	White		
Terminal Housing Finish	Blue		
Insert Colour	Blue		
Materials	Cover & Housings: Polycarbonate	Terminals& Screws: Brass	
	Contacts: Brass	Cable Grip: Nylon	
	Cable Grip Screws: Plated Steel		
Operating Voltage (AC)	250	Frequency (Hz)	50/60
Resistive Load Rating (A)	6		
Termination Type	Screw		
Terminal Capacity - Solid (mm^2)	3 x 2.5		
Cable Restraint Supplied	Yes		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +50		
Warranty (Years)	10		

Standards BS 6972, BS 5733

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
Suitable for flush mounting or mounting on to BESA conduit connection boxes.

Components Supplied PRC1440-2 - 4 Terminal Ceiling Rose Socket / Base
, PRC1420 - 4 Pin Ceiling Rose Plug
, PRC1030 - Ceiling Rose Cover

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN