


Product Code: SFBK104BK

Description: 10AX 4 Gang 2 Way Single Plate Switch

Luckinslive 438833713

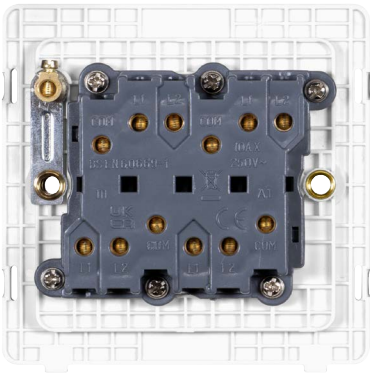

General Information

Dimensions (mm)	86 (W) x 86 (H) x 23.5 (D)		
Insert Dimensions (mm)	82.5 (W) x 82.5 (H) x 2.5 (D)		
Plate Dimensions (mm)	86 (W) x 86 (H) x 4 (D)		
Plate Fixing Centres - Horizontal (mm)	60.3		
Style	Screwless Complete		
Finish	Matt Black		
Insert Colour	Black		
Materials	Cover Plate: Polycarbonate		Insert: Polycarbonate
	Rear Housing: Nylon		Terminals: Brass
	Terminal Screws: Steel & Yellow Passivated		Contacts: Silver "on-lay" Copper / Brass
	Internal Busbars: Formed Pressed Brass		Earth Strap: Mild Steel
Anti Microbial Certified	No		
Operating Voltage (AC)	250	Frequency (Hz)	50
Inductive Load Rating (AX)	10		
Load Rating Comments	Suitable for Fluorescent or Inductive Loads		
Termination Type	Screw		
Terminal Size (mm)	Ø3.5	Terminal Torque Value (Nm)	0.5
Terminal Capacity - Solid (mm²)	2 x 1.5		
Modular Rocker Switches	No		
2 Way Switch	Yes		
Minimum Back Box Depth (mm)	25		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	20		

Standards BS EN 60669-1

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.

The MiniGrid modules installed are moulded black (BK) finish.

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Interchangeable with moulded black (BK) modules in the MiniGrid Range.

