


Product Code: SFBZ104BK

Luckinslive 438833658

Description: 10AX Ingot 4 Gang 2 Way Plate Switch

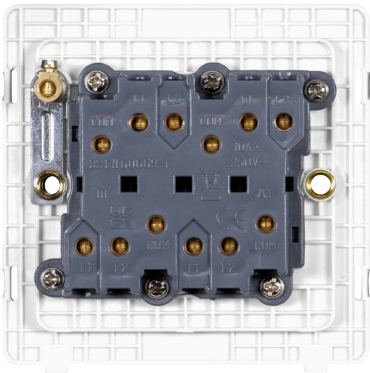

General Information

Dimensions (mm)	86 (W) x 86 (H) x 23.5 (D)		
Insert Dimensions (mm)	82.5 (W) x 82.5 (H) x 2.5 (D)		
Plate Dimensions (mm)	86 (W) x 86 (H) x 4 (D)		
Plate Fixing Centres - Horizontal (mm)	60.3		
Style	Screwless Complete		
Finish	Matt Bronze		
Insert Colour	Black		
Materials	Cover Plate: Stainless Steel		Insert: Polycarbonate
	Switch Cover: Matt Bronze		Rear Housing: Nylon
	Terminals: BraBZ		Terminal Screws: Steel & Yellow PaBZivated
	Contacts: Silver "on-lay" Copper / BraBZ		Internal Busbars: Formed PreBZed BraBZ
	Earth Strap: Mild Steel		
Anti Microbial Certified	No		
Operating Voltage (AC)	250	Frequency (Hz)	50
Inductive Load Rating (AX)	10		
Load Rating Comments	Suitable for Fluorescent or Inductive Loads		
Termination Type	Screw		
Terminal Size (mm)	Ø3.5	Terminal Torque Value (Nm)	0.5
Terminal Capacity - Solid (mm²)	2 x 1.5		
Modular Rocker Switches	No		
2 Way Switch	Yes		
Minimum Back Box Depth (mm)	25		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	20		

Standards BS EN 60669-1

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Interchangeable with modules in the MiniGrid Range.

