


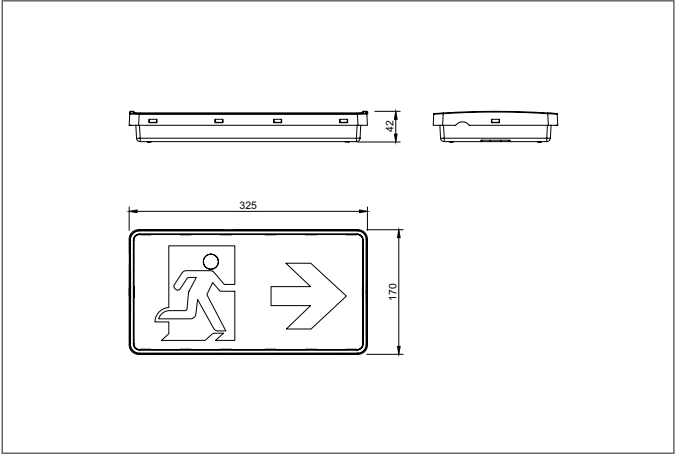

General Information

|                     |                                       |
|---------------------|---------------------------------------|
| Dimensions (mm)     | 175 (H) x 325 (W) x 42 (D)            |
| Materials           | Housing: Polycarbonate; Sign: Acrylic |
| Colour              | Black                                 |
| Product Weight (Kg) | 0.54                                  |
| Ingress Protection  | IP65                                  |
| Self-Test Facility  | Facility to Enable or Disable         |
| Warranty (Years)    | 5                                     |

Supply & Power Information

|                                        |                 |
|----------------------------------------|-----------------|
| Continuous Operating Voltage (AC) (Hz) | 220-240 (50/60) |
| Circuit Wattage (W)                    | 2.5             |
| LED Wattage (W)                        | 2.5             |
| Input Current                          | 45              |
| Operation Mode                         | Maintained      |
| Driver Output                          | 260-300mA       |
| Operating Temperature (°C)             | 0 to +40        |

Luminaire Output

|                            |       |
|----------------------------|-------|
| Colour Temperature (K)     | 5500  |
| Typical Luminous Flux (lm) | 60    |
| Beam Angle (°)             | 140   |
| Colour Render Index (CRI)  | ≥73   |
| Viewing Distance (M)       | 32    |
| LED Lifetime (L70) (Hours) | 35000 |

Emergency Backup Information

|                              |                                        |
|------------------------------|----------------------------------------|
| Self-Test Facility           | Facility to Enable or Disable          |
| Emergency Luminous Flux (lm) | 60                                     |
| Battery Specification        | 3.2V 1800mAh Lithium (LiFePO4) Battery |
| Minimum Duration (Hours)     | 3                                      |

Compatible Accessories

|                                                                      |
|----------------------------------------------------------------------|
| OBKB3218 - 3.2V 1800mAh Lithium (LiFePO4) Battery With 15cm Fly Lead |
|----------------------------------------------------------------------|

