define®

Technical Specification


CLICK® Scolmore GROUP

Product Code: FPMB157BK

Luckinslive 439634283

Description: Isolated Satellite & Isolated Coaxial Outlet



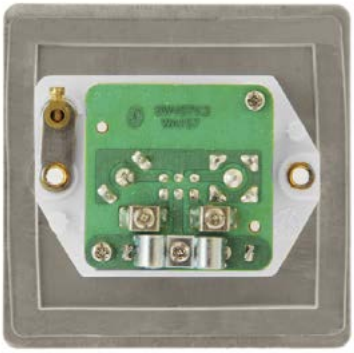

General Information

Dimensions (mm)	86 (W) x 86 (H) x 34 (D)		
Plate Dimensions (mm)	86 (W) x 86 (H) x 1.3 (D)		
Dimensions With Gasket (mm)	86 (W) x 86 (H) x 3 (D)		
Plate Fixing Centres - Horizontal (mm)	60.3		
Style	Flat Plate		
Finish	Matt Black		
Insert Colour	Black		
Gasket Colour	Transparent (Neoprene)		
Supplied Fixing Screw Finish	Matt Black		
Materials	Front Plate: Stainless Steel	Insert: Urea	
	Earth Plate: Mild Steel	Terminals: Brass	
Anti Microbial Certified	No		
Termination Type	Screw		
Isolated	Yes		
Isolated Comments	Enables 1 way signal, reducing signal interference		
Non-Isolated	No		
Shielded	No		
Minimum Back Box Depth (mm)	25		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	20	Warranty - Electronics (Years)	2

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
Isolated socket will filter out any interference, if a 2 way signal is required, i.e. for use with satellite hard wire extensions, then a non-isolated outlet is required.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CE UKCA

CLICK OR SCAN Catalogue Range DoC Installation CLICK OR SCAN