



Product Code: SIN786BK

Luckinslive 408904847

Description: 13A 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets Insert



**General Information**

Insert Dimensions (mm)	142.5 (W) x 82.5 (H) x 2.5 (D)		
Plate Fixing Centres - Horizontal (mm)	120.6		
Style	Screwless Insert		
Insert Colour	Black		
Compatible Cover Plate	SCP486#		
Materials	Insert: Polycarbonate Switch: Polycarbonate Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass Earth Strap: Mild Steel	Rear Housing: Nylon Terminals: Brass Contacts: Silver "on-lay" Copper / Brass PCB: Mixed Components	
Anti Microbial Certified	No		
Operating Voltage (AC)	250	Frequency (Hz)	50
Resistive Load Rating (A)	13		
USB Output Type	USB Type 'A' & Type 'C'		
USB Number Of Outputs	2	USB Charging Total Load (A)	4.2
USB Charging Voltage (V DC)	5	USB Standby Current (mA)	2
Termination Type	Screw		
Terminal Size (mm)	Ø5	Terminal Torque Value (Nm)	1.2
Terminal Capacity - Solid (mm <sup>2</sup> )	3 x 2.5 or 2 x 4		
Single Pole Switched	Yes		
3 Pin Safety Shuttered	Yes		
Twin Earth Terminals	Yes		
Product Marking	DC, 5V 3A, 5V 2.4A max, 4.2A		
Minimum Back Box Depth (mm)	35		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	20	Warranty - Electronics (Years)	2

**Standards** BS 1363-2: 2016 +A1: 2018, BS EN IEC 62368-1, BS EN 62680-1-1

**Additional Information**

For cleaning / polishing of products, use only a soft, dry, clean cloth.  
 The USB circuits within this socket outlet are designed to withstand insulation resistance tests at 500V.  
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.  
 Independent Charging: 5V DC, 4.2A - USB Type A (2.4A), USB Type C (3A)  
 Dual Charging: 5V DC, 4.2A - USB Type A (1.2A), USB Type C (3A)



Catalogue



Range



DoC



Installation






Product Code: SIN786BK

Luckinslive 408904847


Description: 13A 2 Gang Switched Socket Outlet With Type A & C USB (4.2A) Outlets Insert

**General Information**


Dimensions (mm)	146 (W) x 86 (H) x 4 (D)
Finishes Available	BS (Brushed Stainless), CH (Polished Chrome), SS (Stainless Steel), MB (Metal Black), MW (Metal White), BK (Matt Black) & PW (Polar White)
Plate Materials	Decorative & Metal Black or White: Stainless Steel, Black & Polar White: Polycarbonate

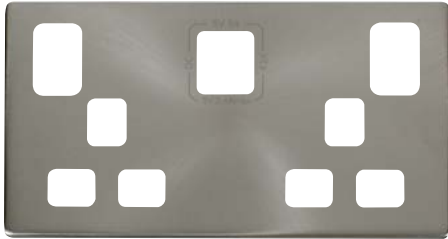


SCP486BS

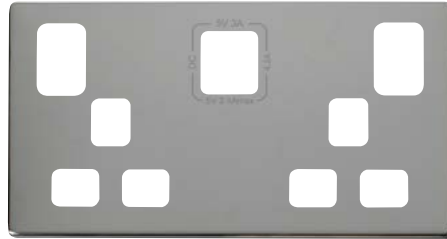


SCP486CH

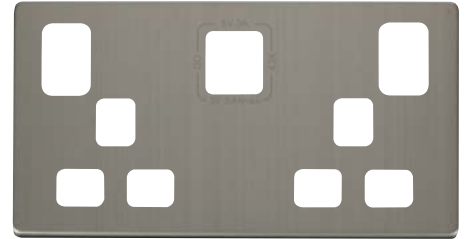


SCP486SS

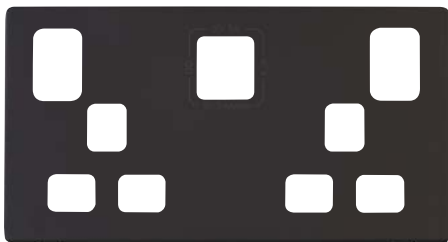


SCP486MB

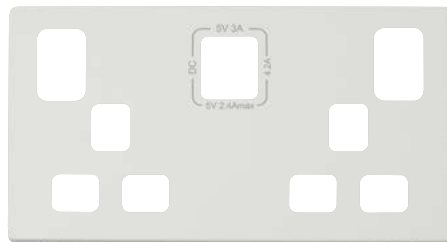

SCP486MW

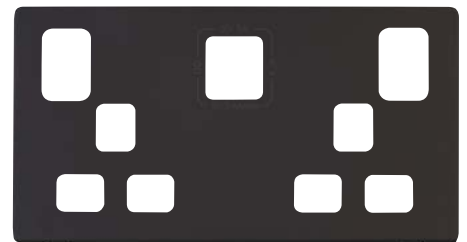

SCP486BK

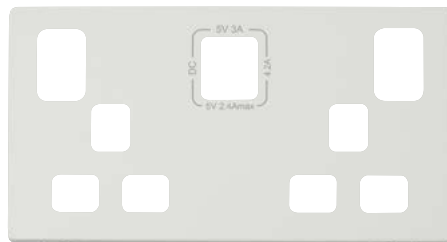

SCP486PW



Catalogue



Range



DoC



Installation

